

APT65RGB

- **Power Handling : 90 Watts RMS**
- **Max Power Handling : 180 Watts**
- **4Ω : Frequency Response : 45Hz - 20KHz**
- 2-Way wakeboard tower speaker enclosure with RGB LED accent lighting
- Marine and power sports grade element proofing technologies.
- 6.5" UV protected 2-way loud speaker with grill mounted aluminum dome tweeter.
- Ultra compact high strength Polyethylene enclosure with UV inhibitors and stainless steel assembly hardware.
- 360° Rotational easy adjust swivel mounting brackets compatible with 1.5", 1.75, 1.85" and 2.00" roll cages.
- Integrated RGB LED accent lighting (RGBC-8 or RGBC-4RF module required - sold separately).
- Marine grade compression speaker terminals.
- Developed for Marine and Power Sports outdoor applications.



LIMITED WARRANTY

DB Drive™ warrants any products purchased in the U.S.A. from an authorized DB Drive™ dealer. All products are warranted to be free from defects in material and workmanship under normal use and service for a period of one year.

DB Drive™ will either repair or replace (as its option) any unit that has been found to be defective and under warranty provided the defect occurs within the warranty period.

One (1) year if purchased through an authorized DB Drive™ dealer.

This limited warranty does not extend to units that have been subjected to misuse, abuse, neglect, or accident. Products that in DB Drive™'s judgment show evidence of having been altered, modified, or serviced without DB Drive™'s authorization, will be ineligible under this warranty.

To obtain warranty service please contact your retailer or see our website www.dbdrive.net for more details.




English



MARINE / POWER SPORTS TOWER SPEAKERS

MODEL #

APT65RGB

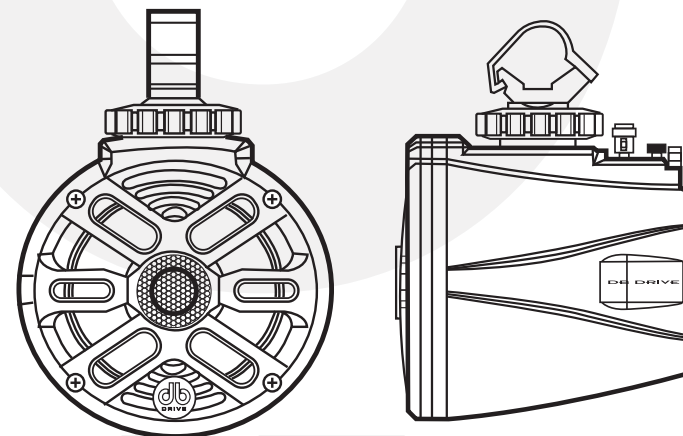

Installation Instructions / Owner's Manual



DB Research L.L.P. ■ 302 Hanmore Industrial Parkway ■ Harlingen, TX 78550
Ph: (877) 787-0101 ■ Fax: (956) 421-4513 ■ tech support: support@dbdrive.net

WAKEBOARD TOWER MOUNTING

MOUNTING THE BRACKET

(1) Remove the bracket bolts from the top bracket from the tubbie.

(2) Hold the bottom bracket up to the mounting surface. Place the top bracket over the wakeboard tower surface and install the mounting bolts.


(3) Tighten the bracket bolts as needed to secure the tubbie bracket on the wakeboard tower.

(4) Once the tubbie has been positioned and secured at the needed position, install the back-up safety cable around the wakeboard tower. (Fig 1)


Note: Use the supplied hardware to secure the bracket to the mounting surface.

DB Research L.L.P. highly recommends that a certified installation technician installation of tubbie enclosure. If you choose to perform the installation yourself, it is absolutely necessary that the tubbie be properly mounted in a well thought out manner. Failure to mount the tubbie properly could present two issues: 1) The tubbies reliability and performance will suffer due to the movement of the tubbie caused by vibration on the craft.

2) A improperly mounted enclosure presents a serious safety hazard especially in rough conditions where loose mounting bolts could cause the mount to fail.

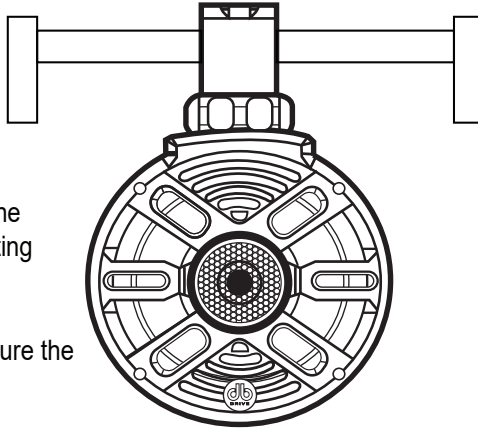


TO ADJUST THE MOUNTING ANGLE OF THE TUBBIE:

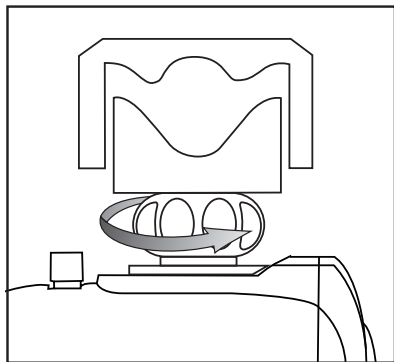

1. Loosen the round adjustment nut, by turning it counter clock wise.
2. Swivel tubbie to desired angle.
3. Once the desired angle is reached, retighten the nut by turning clock wise.

Note: No special tools are required to make the adjustment since hand tightening is all that is required for a secure adjustment.

WIRING DIAGRAMS

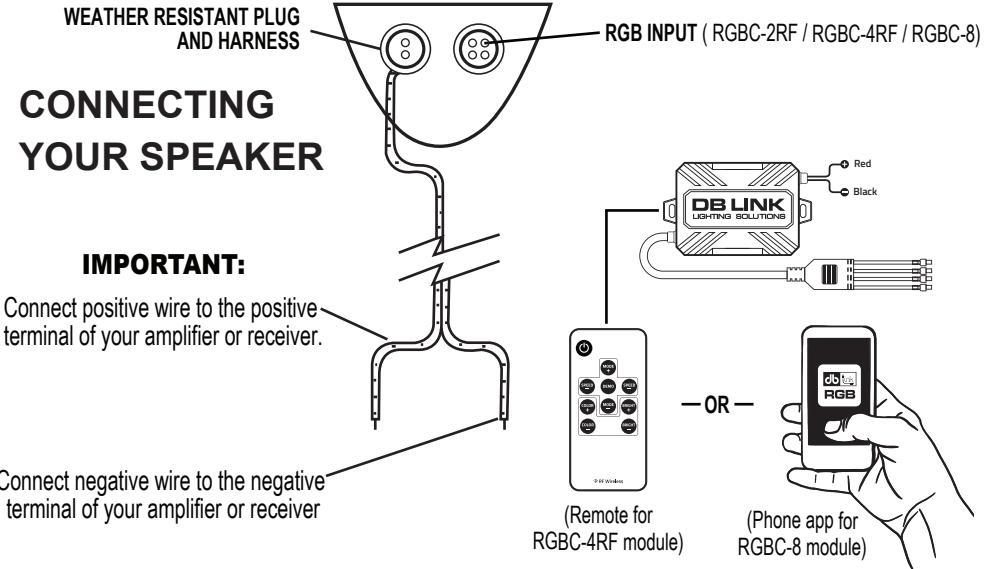


RGB Accent lighting function requires the use of either (RGBC-8 Phone app) or (Wireless Remote)




Compatible with:




RGB Marine/Power Sports Audio and RGB Lightbars




Tower Speakers



Speakers




Sound Bars



RGB Lightbars

Control all your RGB accent lights from one controller



LIMITED WARRANTY. What is not Covered. This warranty does not cover fading or discoloration caused by exposure to sunlight or cleaning with any cleaning chemicals or materials that contain abrasive substances. This warranty is void if DB Research L.L.P. deems that the product was abused or misused. Abuse causing thermal (burnt voice coil) and/or mechanical failure, improper installation, negligence, normal wear and tear, excessive or direct exposure to water. The warranty is non transferable and only applies to the original sale. DB Research L.L.P. is not responsible for any possible damages to a person or consumer's boat from a product failure. The warranty is void if DB Research L.L.P. deems this product was installed or used improperly. * Additional warranty information is included on the warranty sheet