

TM

LUX PERFORMANCE

**OFF-ROAD
LED LIGHTS**



DESIGNED TO HANDLE
THE ROUGHEST TERRAIN



2023 - 2024 OFF-ROAD PRODUCT GUIDE

LX SERIES • STRAIGHT DOUBLE ROW LIGHT BARS

8" 8in / 20.32cm 3.4in / 86.5mm
1850 LUMENS
36 WATTS 3in / 78.5mm

12" 12in / 30.48cm 3.4in / 86.5mm
3000 LUMENS
60 WATTS 3in / 78.5mm

22" 22.16in / 56.28cm 3.4in / 86.5mm
6200 LUMENS
120 WATTS 3in / 78.5mm

32" 32.2in / 81.8cm 3.4in / 86.5mm
9200 LUMENS
180 WATTS 3in / 78.5mm

42" 42.2in / 107cm 3.4in / 86.5mm
12250 LUMENS
240 WATTS 3in / 78.5mm

50" 50.11in / 127.3cm 3.4in / 86.5mm
14750 LUMENS
288 WATTS 3in / 78.5mm

TWO YEAR WARRANTY
2 YEAR WARRANTY

IP67
 Element Rating

HIGH OUTPUT
 LED's

Shatterproof Polycarbonate Lens

Combination Spot / Flood Lighting Pattern Light Bar

- High Power LED Light bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens

- Harness Sold Separately:

DBLXH1



DBLXH1 Harness compatible with 8"-50" / 20.32cm - 127cm Straight and Curved LED Bars

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXS8C	4 Spot / 8 Flood	36	12	8" / 20.32cm	6
DBLXS12C	12 Spot / 8 Flood	60	20	12" / 30.48cm	4
DBLXS22C	24 Spot / 16 Flood	120	40	22" / 56.28cm	4
DBLXS32C	36 Spot / 24 Flood	180	60	32" / 81.78cm	4
DBLXS42C	48 Spot / 32 Flood	240	80	42" / 107cm	4
DBLXS50C	60 Spot / 40 Flood	288	100	50" / 127.3cm	4

* Images displayed are for illustration purposes only and may differ from actual photos

24"
24.32in / 56.28cm
3.5in / 90.5mm
3in / 78.5mm
120 WATTS **6200 LUMENS**
TWO YEAR WARRANTY
IP67 Element Rating
HIGH OUTPUT LED's
Shatterproof Polycarbonate Lens

32"
32.2in / 81.8cm
4.39in / 111.6mm
3in / 78.5mm
180 WATTS **9200 LUMENS**

42"
42.08in / 107cm
5.1in / 130mm
3in / 78.5mm
240 WATTS **12250 LUMENS**

50"
50.11in / 127.3cm
5.9in / 150mm
3in / 78.5mm
288 WATTS **14750 LUMENS**

Spot / Flood Lighting Pattern Curved Light Bar

- High Power LED Light bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens

▪ Harness Sold Separately:

DBLXH1



DBLXH1 Harness compatible with

8"-50" / 20.32cm - 127cm Straight and Curved LED Bars

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXC24C	24 Spot / 16 Flood	120	40	24" / 56.28cm	4
DBLXC32C	36 Spot / 24 Flood	180	60	32" / 81.8cm	4
DBLXC42C	48 Spot / 32 Flood	240	80	42" / 107cm	3
DBLXC50C	60 Spot / 40 Flood	288	96	50" / 127.3cm	3

LX SERIES • CURVED COMBO LED LIGHT BARS

BLACK-OUT ULTRA THIN STRAIGHT LIGHT BARS




IP67
Element Rating

HIGH OUTPUT
LED's




2100 LUMENS
30 WATTS

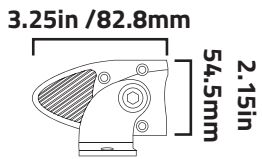


7000 LUMENS
100 WATTS



10,500 LUMENS
150 WATTS

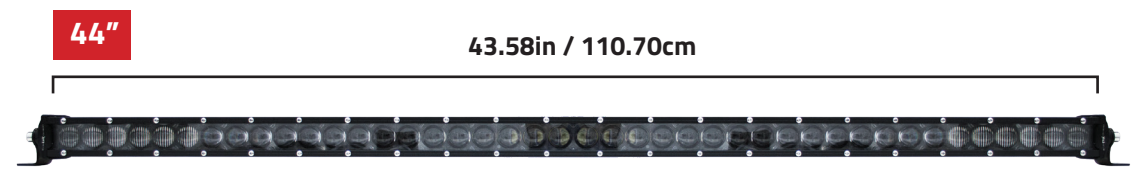

14,700 LUMENS
210 WATTS

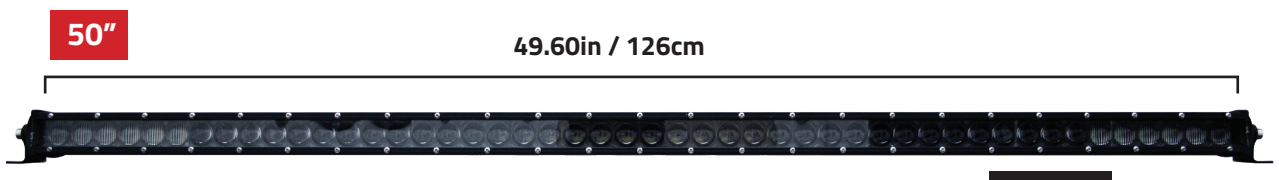

16,800 LUMENS
240 WATTS

Combination Spot / Flood Lighting Pattern Light Bar

- High Power LED Light bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens
- Black-Out Trim Bezel

▪ Harness Sold Separately:



DBLXH1 Harness compatible with 8"-50" / 20.32cm - 127cm Straight and Curved LED Bars

ULTRA THIN
2" / 5.08cm
THICK LIGHT BAR

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXSR8C	2 Spot / 4 Flood	30	6	8" / 19.3cm	12
DBLXSR22C	12 Spot / 8 Flood	100	20	22" / 54.8cm	6
DBLXSR32C	22 Spot / 8 Flood	150	30	32" / 80.3cm	4
DBLXSR44C	30 Spot / 12 Flood	210	42	44" / 110.70cm	4
DBLXSR50C	36 Spot / 12 Flood	240	48	50" / 126cm	4

* Images displayed are for illustration purposes only and may differ from actual photos


IP67
Element Rating

HIGH OUTPUT
LED's

Shatterproof Polycarbonate Lens



3.25in / 82.8mm

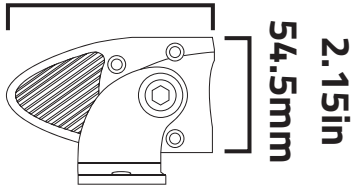

BLACK-OUT ULTRA THIN
Curved
LIGHT BARS

44"

43.58in / 110.7cm



14,700
LUMENS
210 WATTS

50"

49.60in / 126cm



16,800
LUMENS
240 WATTS

Spot / Flood Lighting Pattern Curved Light Bar

- High Power LED Light bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens
- Black-Out Trim Bezel

▪ Harness Sold Separately:



DBLXH1 Harness compatible with

8"-50" / 20.32cm - 127cm Straight and Curved LED Bars

ULTRA THIN
2" / 5.08cm
THICK LIGHT BAR

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXSRC44C	30 Spot / 12 Flood	210	42	44" / 110.7cm	4
DBLXSRC50C	36 Spot / 12 Flood	240	48	50" / 126cm	4

SR SERIES • CURVED SINGLE ROW LIGHT BARS

8" 8.1in / 20.6cm 3in/78.13mm 1850 LUMENS 36 WATTS 3.12in 79.46mm

12" 12.10in / 30.73cm 3in/78.13mm 3000 LUMENS 60 WATTS 3.12in 79.46mm

22" 22.16in / 56.3cm 3in/78.13mm 6200 LUMENS 120 WATTS 3.12in 79.46mm

32" 32.2in / 81.8cm 3in/78.13mm 9200 LUMENS 180 WATTS 3.12in 79.46mm

42" 42.2in / 107.3cm 3in/78.13mm 12250 LUMENS 240 WATTS 3.12in 79.46mm

50" 50.11in / 127.3cm 3in/78.13mm 14750 LUMENS 288 WATTS 3.12in 79.46mm

52" 52.28in / 132.8cm 3in/78.13mm 15365 LUMENS 300 WATTS 3.12in 79.46mm

IP67 Element Rating

HIGH OUTPUT LED's

Shatterproof Polycarbonate Lens

Combination Spot / Flood Lighting Pattern Light Bar

- High Power LED Light Bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens
- 45,000 Hours Lifespan

▪ Harness Sold Separately:

DBLXH1



DBLXH1 Harness compatible with

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLE8C	4 Spot / 4 Flood	36	12	8" / 20.6cm	6
DBLE12C	24 Spot / 4 Flood	60	20	12" / 30.73cm	4
DBLE22C	22 Spot / 16 Flood	120	40	22" / 56.3cm	4
DBLE32C	36 Spot / 24 Flood	180	60	32" / 81.8cm	4
DBLE42C	48 Spot / 32 Flood	240	80	42" / 107.3cm	4
DBLE50C	56 Spot / 40 Flood	288	96	50" / 127.3cm	4
DBLE52C	60 Spot / 40 Flood	300	100	52" / 132.8cm	4



* Images displayed are for illustration purposes only and may differ from actual photos



1550 LUMENS
27 WATTS



- Sold as Single
- Harness Sold Separately

DBLXW5.5R

5.5" / 13.97cm Round Flood 9 - 3W

1550 LUMENS
27 WATTS



- Sold as Single
- Harness Sold Separately

DBLXW4.0S

4" / 10.16cm Square Flood 9 - 3W

1550 LUMENS
20 WATTS



- Sold as Single
- Harness Sold Separately

DBLXW3.0S

3" / 7.62cm Square Spot 4 - 5W

1550 LUMENS
20 WATTS



- Sold as Single
- Harness Sold Separately

DBLXW3.0F

3" / 7.62cm Square Flood 4 - 5W

1200 LUMENS
20 WATTS



- Sold as Single
- Harness Sold Separately

DBLXFW3.0F

3" / 7.62cm Square Flush Mount Flood 4 - 5W

- Sold as Single
- Harness Sold Separately



DBLXSR6F **18 WATTS**

6" / 15.24cm Single Row Flood 6 - 3W



DBLXH1

Wiring Harness

Compatible with all 8"-50" LED Bars
8"-50" / 20.32 - 127cm Straight and Curved LED Bars

FEATURES & SPECS

- IP67 Element Rating
- Shockproof Electronics
- Black Aluminum Chassis
- 10v-24v DC Operating Voltage


IP67
Element Rating

HIGH OUTPUT
LED's

Shatterproof Polycarbonate Lens

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXW5.5R	5.5" Round Flood	27	9	5.5" / 13.97cm	20
DBLXW4.0S	4" Square Flood	27	9	4" / 10.16cm	20
DBLXW3.0S	3" Square Spot	20	4	3" / 7.62cm	20
DBLXW3.0F	3" Square Flood	20	4	3" / 7.62cm	20
DBLXFW3.0F	3" Flush Mount Flood	20	4	3" / 7.62cm	20
DBLXSR6F	6" Single Row Flood	18	6	6" / 15.24cm	20
DBLXH1	Wiring Harness	N/A	N/A	15ft	25

LED WORK LIGHTS

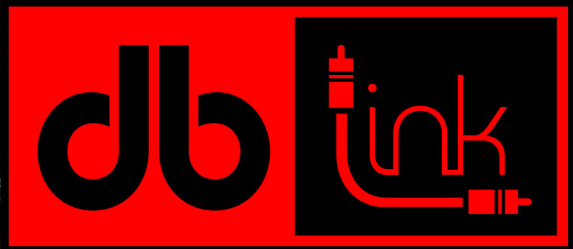

TM

LUX PERFORMANCE

LUXCAT23A
81153603 496

DB
RESEARCH™

302 Hanmore Industrial Parkway/Harlingen, TX 78550
Toll Free: (877) 787-0101 Fax: (956) 421-4513
www.DBLINKLIGHTINGSOLUTIONS.com sales@dbdrive.net
Printed in China
Model # LUXCAT23A