



TM

LUX PERFORMANCE



OFF-ROAD LED LIGHTS

Designed to handle the roughest terrain



2024-2025 OFF-ROAD PRODUCT GUIDE

8" 8in / 20.32cm 3.4in / 86.5mm
1850 LUMENS
36 WATTS 3in / 78.5mm

12" 12in / 30.48cm 3.4in / 86.5mm
3000 LUMENS
60 WATTS 3in / 78.5mm

22" 22.16in / 56.28cm 3.4in / 86.5mm
6200 LUMENS
120 WATTS 3in / 78.5mm

32" 32.2in / 81.8cm 3.4in / 86.5mm
9200 LUMENS
180 WATTS 3in / 78.5mm

42" 42.2in / 107cm 3.4in / 86.5mm
12250 LUMENS
240 WATTS 3in / 78.5mm

50" 50.11in / 127.3cm 3.4in / 86.5mm
14750 LUMENS
288 WATTS 3in / 78.5mm

TWO YEAR WARRANTY
2 YEAR WARRANTY

IP67
 Element Rating

HIGH OUTPUT
 LED's

Shatterproof Polycarbonate Lens

Combination Spot / Flood Lighting Pattern Light Bar

- High Power LED Light bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens

- Harness Sold Separately:



DBLXH1 Harness compatible with 8"-50" / 20.32cm - 127cm Straight and Curved LED Bars

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXS8C	4 Spot / 8 Flood	36	12	8" / 20.32cm	6
DBLXS12C	12 Spot / 8 Flood	60	20	12" / 30.48cm	4
DBLXS22C	24 Spot / 16 Flood	120	40	22" / 56.28cm	4
DBLXS32C	36 Spot / 24 Flood	180	60	32" / 81.78cm	4
DBLXS42C	48 Spot / 32 Flood	240	80	42" / 107cm	4
DBLXS50C	60 Spot / 40 Flood	288	100	50" / 127.3cm	4

* Images displayed are for illustration purposes only and may differ from actual photos

24"
24.32in / 56.28cm
3.5in / 90.5mm
3in / 78.5mm
120 WATTS
6200 LUMENS

32"
32.2in / 81.8cm
4.39in / 111.6mm
3in / 78.5mm
180 WATTS
9200 LUMENS

42"
42.08in / 107cm
5.1in / 130mm
3in / 78.5mm
240 WATTS
12250 LUMENS

50"
50.11in / 127.3cm
5.9in / 150mm
3in / 78.5mm
288 WATTS
14750 LUMENS

TWO YEAR WARRANTY
2 YEAR WARRANTY

IP67
Element Rating

HIGH OUTPUT
LED's

Shatterproof Polycarbonate Lens

Spot / Flood Lighting Pattern Curved Light Bar

- High Power LED Light bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens

▪ Harness Sold Separately:



DBLXH1

DBLXH1 Harness compatible with

8"-50" / 20.32cm - 127cm Straight and Curved LED Bars

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXC24C	24 Spot / 16 Flood	120	40	24" / 56.28cm	4
DBLXC32C	36 Spot / 24 Flood	180	60	32" / 81.8cm	4
DBLXC42C	48 Spot / 32 Flood	240	80	42" / 107cm	3
DBLXC50C	60 Spot / 40 Flood	288	96	50" / 127.3cm	3

LX SERIES • CURVED COMBO LED LIGHT BARS

BLACK-OUT ULTRA THIN STRAIGHT LIGHT BARS




8"

7.6in / 19.3cm

2100 LUMENS
30 WATTS

3.25in / 82.8mm



IP67
Element Rating

HIGH OUTPUT
LED's



22"

21.6in / 54.8cm


7000 LUMENS
100 WATTS



32"

31.6in / 80.3cm


10,500 LUMENS
150 WATTS

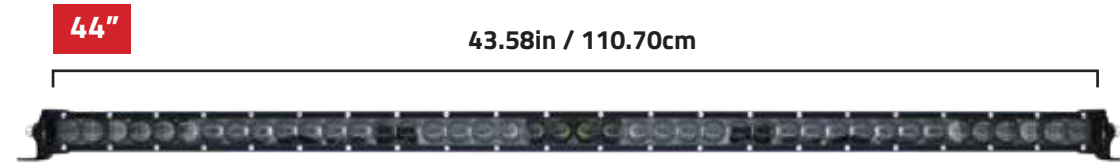

44"

43.58in / 110.70cm

14,700 LUMENS
210 WATTS

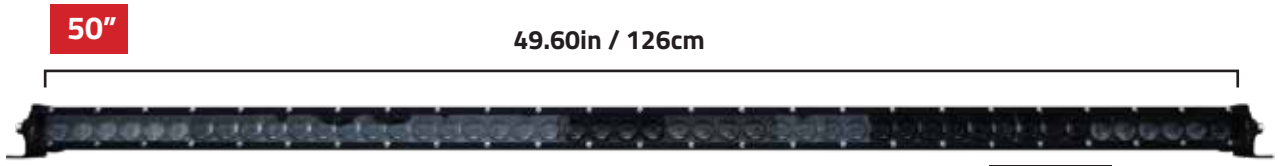

50"

49.60in / 126cm

16,800 LUMENS
240 WATTS

Combination Spot / Flood Lighting Pattern Light Bar

- High Power LED Light bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens
- Black-Out Trim Bezel

▪ Harness Sold Separately:



DBLXH1

DBLXH1 Harness compatible with 8"-50" / 20.32cm - 127cm Straight and Curved LED Bars


ULTRA THIN
2" / 5.08cm
THICK LIGHT BAR

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXSR8C	2 Spot / 4 Flood	30	6	8" / 19.3cm	12
DBLXSR22C	12 Spot / 8 Flood	100	20	22" / 54.8cm	6
DBLXSR32C	22 Spot / 8 Flood	150	30	32" / 80.3cm	4
DBLXSR44C	30 Spot / 12 Flood	210	42	44" / 110.70cm	4
DBLXSR50C	36 Spot / 12 Flood	240	48	50" / 126cm	4

* Images displayed are for illustration purposes only and may differ from actual photos



3.25in / 82.8mm

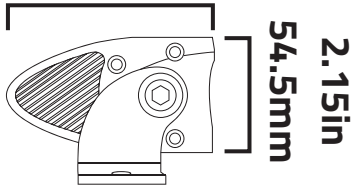

BLACK-OUT ULTRA THIN **Curved** LIGHT BARS

44"

43.58in / 110.7cm



14,700
LUMENS
210 WATTS

50"

49.60in / 126cm




16,800
LUMENS
240 WATTS

Spot / Flood Lighting Pattern Curved Light Bar

- High Power LED Light bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens
- Black-Out Trim Bezel

▪ Harness Sold Separately:

DBLXH1




DBLXH1 Harness compatible with

8"-50" / 20.32cm - 127cm Straight and Curved LED Bars

ULTRA THIN
2" / 5.08cm
THICK LIGHT BAR

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXSRC44C	30 Spot / 12 Flood	210	42	44" / 110.7cm	4
DBLXSRC50C	36 Spot / 12 Flood	240	48	50" / 126cm	4

SR SERIES • CURVED SINGLE ROW LIGHT BARS

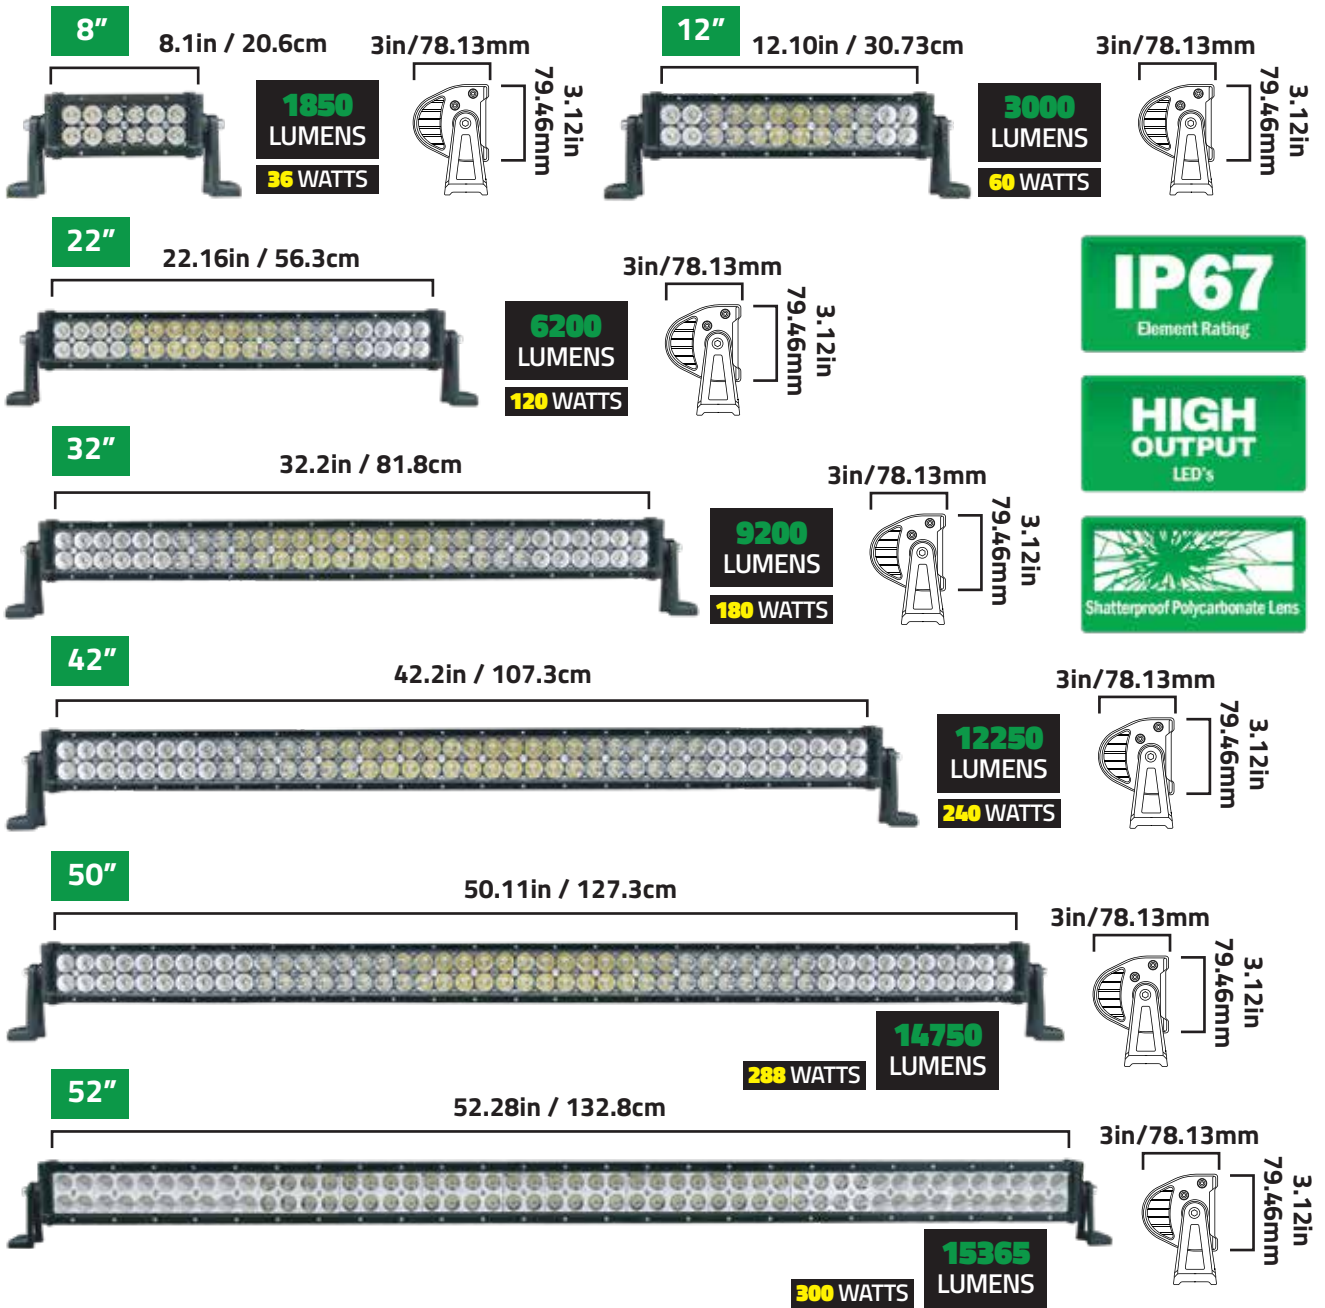


Combination Spot / Flood Lighting Pattern Light Bar

- High Power LED Light Bar
- IP67 Element Rating
- Shock Proof Electronics
- Black Extruded Aluminum Chassis
- Shatter Proof Polycarbonate Lens
- 45,000 Hours Lifespan

▪ Harness Sold Separately:

DBLXH1



DBLXH1 Harness compatible with

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLE8C	4 Spot / 4 Flood	36	12	8" / 20.6cm	6
DBLE12C	24 Spot / 4 Flood	60	20	12" / 30.73cm	4
DBLE22C	22 Spot / 16 Flood	120	40	22" / 56.3cm	4
DBLE32C	36 Spot / 24 Flood	180	60	32" / 81.8cm	4
DBLE42C	48 Spot / 32 Flood	240	80	42" / 107.3cm	4
DBLE50C	56 Spot / 40 Flood	288	96	50" / 127.3cm	4
DBLE52C	60 Spot / 40 Flood	300	100	52" / 132.8cm	4



* Images displayed are for illustration purposes only and may differ from actual photos



1550 LUMENS
27 WATTS



- Sold as Single
- Harness Sold Separately

DBLXW5.5R

5.5" / 13.97cm Round Flood 9 - 3W

1550 LUMENS
27 WATTS



- Sold as Single
- Harness Sold Separately

DBLXW4.0S

4" / 10.16cm Square Flood 9 - 3W

1550 LUMENS
20 WATTS



- Sold as Single
- Harness Sold Separately

DBLXW3.0S

3" / 7.62cm Square Spot 4 - 5W

1550 LUMENS
20 WATTS



- Sold as Single
- Harness Sold Separately

DBLXW3.0F

3" / 7.62cm Square Flood 4 - 5W

1200 LUMENS
20 WATTS



- Sold as Single
- Harness Sold Separately

DBLXFW3.0F

3" / 7.62cm Square Flush Mount Flood 4 - 5W

- Sold as Single
- Harness Sold Separately



DBLXSR6F **18 WATTS**

6" / 15.24cm Single Row Flood 6 - 3W



DBLXH1

Wiring Harness

Compatible with all 8"-50" LED Bars
8"-50" / 20.32 - 127cm Straight and Curved LED Bars



FEATURES & SPECS

- IP67 Element Rating
- Shockproof Electronics
- Black Aluminum Chassis
- 10v-24v DC Operating Voltage

MODEL	LED DESCRIPTION	WATTS	LEDS	SIZE	M. CARTON
DBLXW5.5R	5.5" Round Flood	27	9	5.5" / 13.97cm	20
DBLXW4.0S	4" Square Flood	27	9	4" / 10.16cm	20
DBLXW3.0S	3" Square Spot	20	4	3" / 7.62cm	20
DBLXW3.0F	3" Square Flood	20	4	3" / 7.62cm	20
DBLXFW3.0F	3" Flush Mount Flood	20	4	3" / 7.62cm	20
DBLXSR6F	6" Single Row Flood	18	6	6" / 15.24cm	20
DBLXH1	Wiring Harness	N/A	N/A	15ft	25

LED WORK LIGHTS



LUX PERFORMANCE



302 Hanmore Industrial Parkway/Harlingen, TX 78550

Toll Free: (877) 787-0101 Fax: (956) 421-4513

www.DBLINKLIGHTINGSOLUTIONS.com sales@dbdrive.net

Printed in China

Model # LUXCAT21A

