



QUANTUM
AUDIO

TM

QRX
SERIES

4 CHANNEL AMPLIFIER

Features


- 4 Channel Full Range Class D Circuitry
 - 2 Stereo Load Capability
 - Low Level RCA Inputs
 - High Level Inputs
- Selectable Crossover: HPF/LPF/FULL
 - Bridgable Outputs @ 4Load
- Compatible With Any 4/2 Speaker
 - High Efficiency Mosfet Design
 - Heat Management System
 - Clip Indicator



AMPLIFIERS	INTERNAL CIRCUITRY	PEAK POWER	@ 4Ω STEREO	@ 2Ω STEREO	@ 4Ω BRIDGED	M CARTON
QRX1504	4 Channel Amplifier	1200 Watts	4 x 150 Watts	4 x 300 Watts	2 x 600 Watts	5

DIMENSIONS

MODEL	LENGTH	HEIGHT	WIDTH
QRX1504	6.05" / 153.7 mm	2.33" / 59.2 mm	5.53" / 140.5 mm

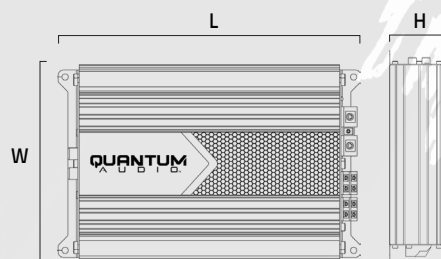



QUANTUM
AUDIO

TM

QRX

SERIES

MONOBLOCK AMPLIFIERS



Features

- Full Range Class D Circuitry
- 1Ω Load Mono Capability
- Low Level RCA Inputs
- High Level Inputs
- High Efficiency Mosfet Design
- Variable HP/LP Crossover
- Heat Management System
- Remote Dash Bass Control
- Clip Indicator


BASS REMOTE INCLUDED



AMPLIFIERS	INTERNAL CIRCUITRY	PEAK POWER	@ 1Ω MONO	@ 2Ω MONO	@ 4Ω MONO	M CARTON
QRX2501	Monoblock Amplifier	2500 Watts	1 x 2500 Watts	1 x 1500 Watts	1 x 750 Watts	5
QRX4001	Monoblock Amplifier	4000 Watts	1 x 4000 Watts	1 x 2000 Watts	1 x 1000 Watts	5

DIMENSIONS

MODEL	LENGTH	HEIGHT	WIDTH
QRX2501	6.05" / 153.7 mm	2.33" / 59.2 mm	5.53" / 140.5 mm
QRX4001	6.83" / 173.5 mm	2.33" / 59.2 mm	5.53" / 140.5 mm

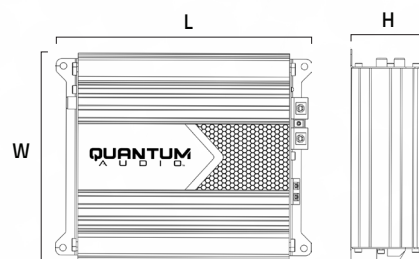

contact us: 877 787 0101



QUANTUM
AUDIO

TM

QPX
SERIES

MONOBLOCK AMPLIFIERS

Features

- 1Ω Load Stable Capability
- 2Ω Load Stereo Capability (QPX2000.1M)
- Amber-Glow Logo Badge
- Audiophile Grade Components
- Speaker Short Circuit Protection
- High Efficiency Mosfet Design
- 12 dB Variable Low Pass X-over
- 12 dB Variable Bass Boost
- 12 dB variable Subsonic Filter 10Hz - 40Hz (QPX2000.1M)
- 12 dB variable Subsonic Filter 15Hz - 55Hz
- Q Link Master /Slave Technology @ 2Ω (QPX3000.1D, QPX4000.1D, QPX5000.1D & QPX6000.1D)





BASS REMOTE INCLUDED



AMPLIFIERS	INTERNAL CIRCUITRY	PEAK POWER	@ 1Ω MONOBLOCK	@ 2Ω MONOBLOCK	M CARTON
QPX2000.1M	Mono Class AB 2Ω Amplifier	2000 Watts	N/A	1 x 2000 Watts	5
QPX3000.1D	Mono Class D 1Ω Amplifier	3000 Watts	1 x 3000 Watts	1 x 1500 Watts	5
QPX4000.1D	Mono Class D 1Ω Amplifier	4000 Watts	1 x 4000 Watts	1 x 2000 Watts	5
QPX5000.1D	Mono Class D 1Ω Amplifier	5000 Watts	1 x 5000 Watts	1 x 2500 Watts	5
QPX6000.1D	Mono Class D 1Ω Amplifier	6000 Watts	1 x 6000 Watts	1 x 3000 Watts	4

DIMENSIONS

MODEL	LENGTH	HEIGHT	WIDTH
QPX2000.1M	11" / 280 mm	1.96" / 50 mm	8.6" / 220 mm
QPX3000.1D	7.50" / 190.50 mm	1.96" / 50 mm	8.6" / 220 mm
QPX4000.1D	9" / 230 mm	1.96" / 50 mm	8.6" / 220 mm
QPX5000.1D	11" / 280 mm	1.96" / 50 mm	8.6" / 220 mm
QPX6000.1D	13" / 330 mm	1.96" / 50 mm	8.6" / 220 mm

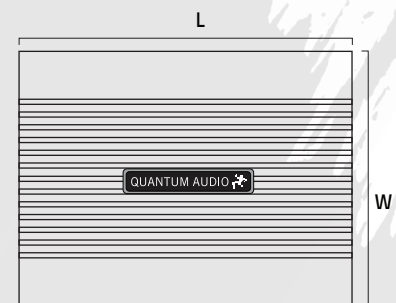

2&4 CHANNEL AMPLIFIERS




Features

- Class A/B Circuitry
- 2Ω Load Stereo Capability
- Amber-Glow Logo Badge
- Audiophile Grade Components
- Speaker Short Circuit Protection
- High Efficiency Mosfet Design
- 12 dB Variable High Pass and Low Pass X-over
- Selectable: 0, 6, 12 dB/ Octave Bass Boost
- Buffered Line Output for Easy Daisy-Chaining (QPX2800.4, QPX2000.4 & QPX1200.2)

AMPLIFIERS	INTERNAL CIRCUITRY	PEAK POWER	@ 4Ω STEREO	@ 2Ω STEREO	BRIDGED @ 4Ω MONO	M CARTON
QPX2800.4	4 Ch Stereo Amplifier	3600 Watts	4 x 180 Watts	4 x 360 Watts	2 x 600 Watts	4
QPX2000.4	4 Ch Stereo Amplifier	2200 Watts	4 x 80 Watts	4 x 160 Watts	2 x 300 Watts	5
QPX1200.2	2 Ch Stereo Amplifier	1800 Watts	2 x 180 Watts	2 x 360 Watts	1 x 600 Watts	5

DIMENSIONS			
MODEL	LENGTH	HEIGHT	WIDTH
QPX2800.4	13.7" / 348 mm	1.96" / 50 mm	8.6" / 220 mm
QPX2000.4	11" / 280 mm	1.96" / 50 mm	8.6" / 220 mm
QPX1200.2	9.8" / 250 mm	1.96" / 50 mm	8.6" / 220 mm

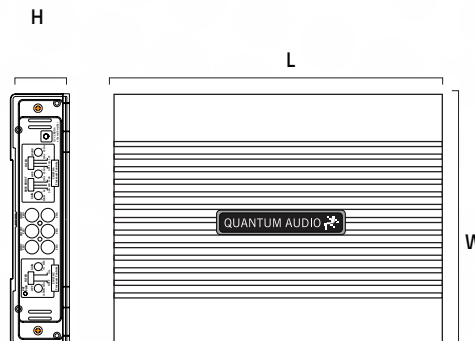

NEW 2024

QEA 3500.1


MONOBLOCK AMPLIFIERS



Features


- Class D Circuitry
- Class A/B Circuitry (QEA1500.1)
 - 1Ω Load Mono Capability
 - 2Ω Load Mono Capability (QEA1500.1)
- Audiophile Grade Components
 - Variable Low Pass Crossover
 - High Efficiency Mosfet Design
- QSINK Heat Management System
- Variable Bass Boost 0-12dB @45hz
 - Input Sensitivity: 285Mv - 6V
 - Signal to Noise ratio >90dB
 - THD at Rated Power <0.5%

BASS REMOTE INCLUDED

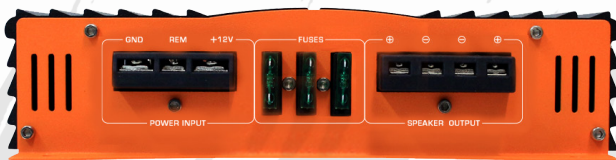

AMPLIFIERS	INTERNAL CIRCUITRY	PEAK POWER	@ 1Ω MONOBLOCK	@ 2Ω MONOBLOCK	@ 4Ω MONOBLOCK	M CARTON
QEA3500.1	Mono Class D 1Ω Amplifier	3500 Watts	1 x 3500 Watts	-	1 x 650 Watts	4
QEA2500.1	Mono Class D 1Ω Amplifier	2500 Watts	1 X 2500 Watts	1 x1250 Watts	1 x 650 Watts	4
QEA1500.1	Mono Class AB 2Ω Amplifier	1500 Watts	-	1 x1500 Watts	1 x 750 Watts	4

DIMENSIONS			
MODEL	LENGTH	HEIGHT	WIDTH
QEA 3500.1	11.54" / 293 mm	2" / 50.80 mm	9.54" / 242.31 mm
QEA2500.1	11" / 280 mm	1.96" / 50 mm	9.54" / 242.31 mm
QEA1500.1	8" / 203 mm	1.96" / 50 mm	9.54" / 242.31 mm

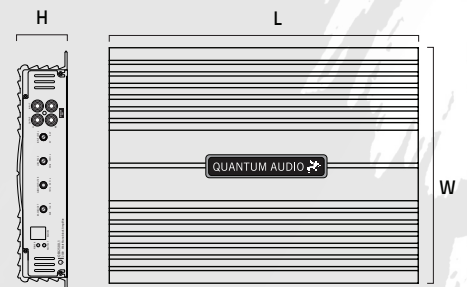



QUANTUM
AUDIO

TM

QEA
SERIES

2&4 CHANNEL AMPLIFIERS

Features


- Class A/B Circuitry
- 2Ω Load Stereo Capability
- Audiophile Grade Components
- Variable Low/ High Pass Crossover
- High Efficiency Mosfet Design
- QSINK Heat Management System
- Bass Boost 0-12dB @ 45Hz
- Input Sensitivity: 285Mv - 6V
- Signal to Noise ratio >90dB
- THD at Rated Power <0.5%
- Bridgeable @ 4Ω



AMPLIFIERS	INTERNAL CIRCUITRY	PEAK POWER	@ 4Ω STEREO	@ 2Ω STEREO	BRIDGED @ 4Ω MONO	M CARTON
QEA800.4	4 Channel Amplifier	3200 Watts	4 x 160 Watts	4 x 320 Watts	2 x 640 Watts	4
QEA800.2	2 Channel Amplifier	1800 Watts	2 x 160 Watt	2 x 320 Watts	1 x 640 Watts	5
QEA500.4	4 Channel Amplifier	2400 Watts	4 x 100 Watts	4 x 200 Watts	2 x 400 Watts	4

DIMENSIONS

MODEL	LENGTH	HEIGHT	WIDTH
QEA800.4	11.73" / 298 mm	1.96" / 50 mm	9.54" / 242.35 mm
QEA800.2	7.04" / 179 mm	1.96" / 50 mm	9.54" / 242.35 mm
QEA500.4	10.82" / 275 mm	1.96" / 50 mm	9.54" / 242.35 mm

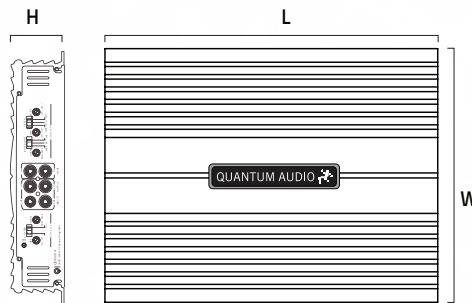

contact us: 877 787 0101

QBE100 DIGITAL BASS ENHANCER

NEW 2024



Features

- 2 Channel Digital Bass Restoration W/ Full Range Pass Through
- Variable Center Frequency Control
- Selectable Output Gain Limiter
- Dash Mount Remote Control
- **Master Carton: 10 pcs**

NEW 2024 **QBE200** DIGITAL BASS ENHANCER

Features

- 2 Channel Digital Bass Restoration
- Parametric Bass Equalization
- Variable Center Frequency Control
- Selectable Balanced/ Non-Balanced RCA inputs
- Selectable Ground Isolation Switch
- Selectable Bass Output Control
- PWM Power Supply
- Dash Subsonic Control
- Selectable PFM Subsonic Filter Switch
- **Master Carton: 20 pcs**



Features

- Bass Enhancement Digital Processor with Level Control
- 5 Band Parametric Equalization
- Selectable 60Hz or 80Hz Low Pass Active Crossover
- Front and Rear Fader Control
- Subwoofer Output Level Control
- Adjustable Input Gains
- 3.5 mm Front Panel Aux Input
- Blue Power-On Illumination
- **Master Carton: 20 pcs**

QEQ10BE 5 BAND EQUALIZER



QEQ5 5 BAND EQUALIZER



8VOLTS
OUTPUT

Features

- Five Band Frequency Stereo Equalization
- Volume Gain with Up to 8 Volts of Output
 - Variable Subwoofer Output Control
 - Main / DVD Input Selector
 - Gold Plated RCA Input Connectors
- Selectable 41Hz - 60Hz Subwoofer Crossover
- Blue Power-On Illumination
- **Master Carton: 20 pcs**

12VOLTS
OUTPUT

Features

- Master Volume Control With Up To 12 Volts Of Max Output
- 7 Band Equalizer With 12 dB Boost/Cut
- Assigned Bands Plus High Frequency Shelving
- Bipolar Switching Power Supply
- Subwoofer Output Level Control
- Selectable Subwoofer Frequency Control
- Gold-Plated RCA Input/Output Connectors
- Rear Panel AUX Input
- **Master Carton: 20 pcs**

QEQ7 7 BAND EQUALIZER





QUANTUM
AUDIO

TM

QWXSERIES
SUBWOOFERS

QUANTUM
WOOFER **X**



2000 Watts
MAX POWER






Features

- 2" High Temperature Voice Coil
- Magnet size: 60 oz.
- Compressed Paper Cone
- Double Stitched Foam Surround
- Heavy Gauge Stamped Steel Basket
- Proprietary Full Round PVC Gasket
- Heavy Gauge Spring Terminals
- Protective Magnet Cover

RECOMMENDED ENCLOSURES

MODEL	SEALED ENCLOSURE	PORTED ENCLOSURE
QWX2000/10D4	.75 cu ft.	1.33 cu ft.
QWX2000/12D4	1.125 cu ft.	1.59 cu ft.

SUBWOOFERS	SUBWOOFER STRUCTURE	MAX POWER	NOMINAL POWER	IMPEDANCE	M CARTON
QWX2000/10D4	10" / 254 mm DVC Subwoofer	2000 Watts	1000 Watts	Dual 4Ω Voice Coil	2 Pcs
QWX2000/12D4	12" / 304.8 mm DVC Subwoofer	2000 Watts	1000 Watts	Dual 4Ω Voice Coil	2 Pcs

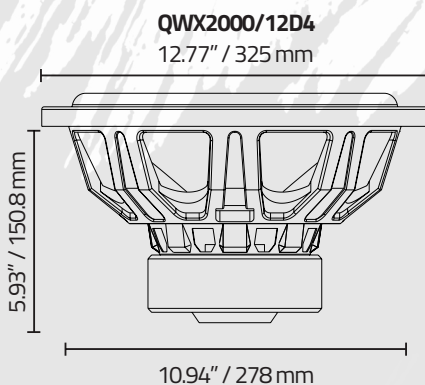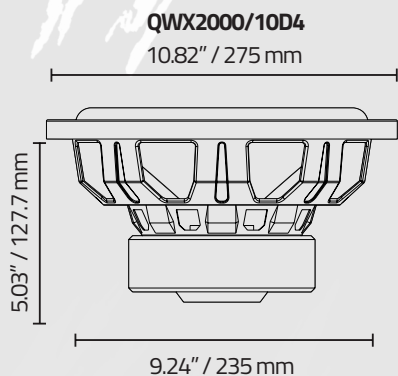



QUANTUM
AUDIO

TM

QWXSERIES
SUBWOOFERS

QUANTUM
WOOFER 

4000 Watts
MAX POWER







Features

- 2.5" High Temperature Voice Coil [QWX400/10D4/12D4/15D4]
- 2" High Temperature Voice Coil [QWX4000/8D4]
 - Magnet Size: 80 oz. [QWX4000/8D4]
 - Magnet size: 100 oz. [QWX4000/10D4/12D4/ 15D4]
- Compressed Paper Cone
- Double Stitched Foam Surround
- High Excursion Foam Surround
- Die-Cast Aluminum Vented Basket
- Proprietary Full Round PVC Gasket
 - Heavy Gauge Spring Terminals
- Heavy Gauge Stamped Steel Basket
 - Protectic Magnet Cover

RECOMMENDED ENCLOSURES

MODEL	SEALED ENCLOSURE	PORTED ENCLOSURE
QWX4000/8D4	.66 cu ft.	1.16 cu ft.
QWX4000/10D4	1.34 cu ft.	1.57 cu ft.
QWX4000/12D4	1.50 cu ft.	1.85 cu ft.
QWX4000/15D4	2.82 cu ft.	2.96 cu ft.

SUBWOOFERS	SUBWOOFER STRUCTURE	MAX POWER	NOMINAL POWER	IMPEDANCE	M CARTON
QWX4000/8D4	8" / 203 mm DVC Subwoofer	4000 Watts	2000 Watts	Dual 4Ω Voice Coil	2 Pcs
QWX4000/10D4	10" / 254 mm DVC Subwoofer	4000 Watts	2000 Watts	Dual 4Ω Voice Coil	2 Pcs
QWX4000/12D4	12" / 305 mm DVC Subwoofer	4000 Watts	2000 Watts	Dual 4Ω Voice Coil	2 Pcs
QWX4000/15D4	15" / 381 mm DVC Subwoofer	4000 Watts	2000 Watts	Dual 4Ω Voice Coil	1 Pcs

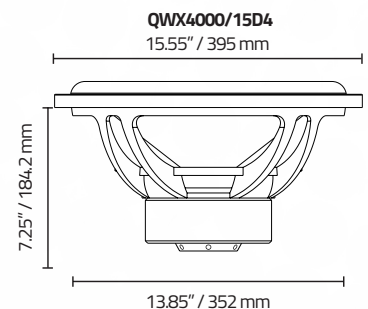

contact us: 877 787 0101



QUANTUM
AUDIO

TM

QW1000 SERIES
SUBWOOFERS





1000 Watts
MAX POWER



Features


- 2.0" / 50.8 mm KSV Voice Coil
- PP Cone W/ Foam Surround
- Injection Molded PP Dust Cap
- High Energy Strontium Ferrite Magnet
- Convection Vented Monolithic Forged Yoke
- Electro-plated finished Top and Bumped Bottom Plate
- CAD Optimized Electro Mechanical and Magnetic Design
 - Low Stress Connecting Leads
 - Poly-Cotton Spider
- Compression Speaker Terminals



SUBWOOFERS	SUBWOOFER STRUCTURE	MAX POWER	NOMINAL POWER	IMPEDANCE	M CARTON
QW1000/10D4	10" / 254 mm DVC Subwoofer	1000 Watts	250 Watts	Dual 4Ω Voice Coil	2 Pcs
QW1000/10S4	10" / 254 mm SVC Subwoofer	1000 Watts	250 Watts	Single 4Ω Voice Coil	2 Pcs
QW1000/12S4	12" / 305 mm SVC Subwoofer	1000 Watts	250 Watts	Single 4Ω Voice Coil	2 Pcs


QW1000/10D4 - QW1000/10S4

10.43" / 265 mm

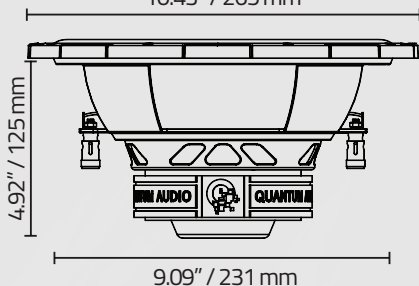

QW1000/12S4

12.40" / 315 mm

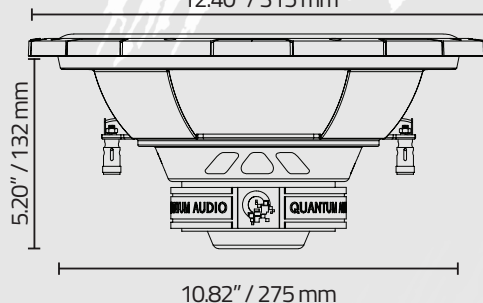

RECOMMENDED ENCLOSURES

MODEL	SEALED ENCLOSURE	PORTED ENCLOSURE
QW1000/10D4	1.15 cu ft.	1.43 cu ft.
QW1000/10S4	1.15 cu ft.	1.43 cu ft.
QW1000/12S4	1.25 cu ft.	1.5 cu ft.



QUANTUM
AUDIO

TM



QW3000 SERIES
SUBWOOFERS

3000 Watts
MAX POWER





Features

- 2.5" / 63.5 mm 4 Layer Aluminum 4Ω DVC
- Heavy Gauge Stamped Steel Basket
 - High Temperature Voice Coil
- QEMT Aluminum Voice Coil Former
 - High-Excursion Foam Surround
 - Compressed Paper Cone
- Injection Molded PP Dust Cap
- Proprietary Full Round PVC Gasket
 - Heavy Gauge Spring Terminal



SUBWOOFERS	SUBWOOFER STRUCTURE	MAX POWER	NOMINAL POWER	IMPEDANCE	M CARTON
QW3000/12D4	12" / 305 mm DVC Subwoofer	3000 Watts	1000 Watts	Dual 4Ω Voice Coil	1 Pcs
QW3000/15D4	15" / 381 mm DVC Subwoofer	3000 Watts	1000 Watts	Dual 4Ω Voice Coil	1 Pcs

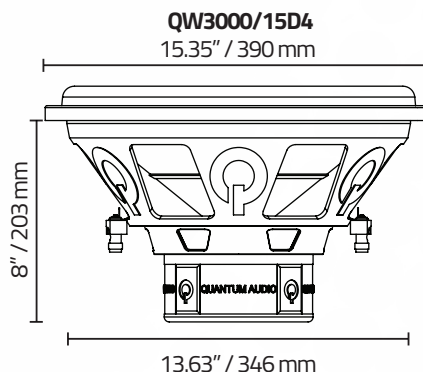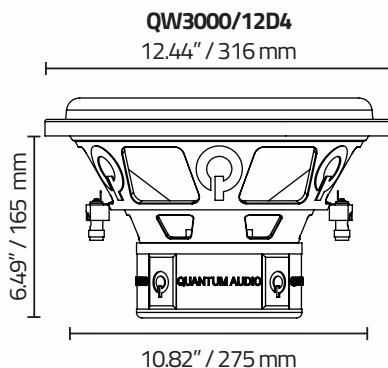

RECOMMENDED ENCLOSURES

MODEL	SEALED ENCLOSURE	PORTED ENCLOSURE
QW3000/12D4	1.40 cu ft.	2.48 cu ft.
QW3000/15D4	2.33 cu ft.	2.95 cu ft.

contact us: 877 787 0101



QUANTUM
AUDIO

TM

QW5000 SERIES SUBWOOFERS

5000 Watts MAX POWER







Features

- 3" / 76.2 mm 4 Layer Aluminum 4Ω DVC
- Heavy Gauge Stamped Steel Basket
 - High Temperature Voice Coil
- QEMT Aluminum Voice Coil Former
 - High-Excursion Foam Surround
 - Compressed Paper Cone
- Injection Molded PP Dust Cap
- Proprietary Full Round PVC Gasket
 - Heavy Gauge Spring Terminal

RECOMMENDED ENCLOSURES

MODEL	SEALED ENCLOSURE	PORTED ENCLOSURE
QWX5000/12D4	1.40 cu ft.	2.48 cu ft.
QWX5000/15D4	2.33 cu ft.	2.95 cu ft.

SUBWOOFERS	SUBWOOFER STRUCTURE	MAX POWER	NOMINAL POWER	IMPEDANCE	M CARTON
QW5000/12D4	12" / 305 mm DVC Subwoofer	5000 Watts	1500 Watts	Dual 4Ω Voice Coil	1 Pcs
QW5000/15D4	15" / 381 mm DVC Subwoofer	5000 Watts	1500 Watts	Dual 4Ω Voice Coil	1 Pcs

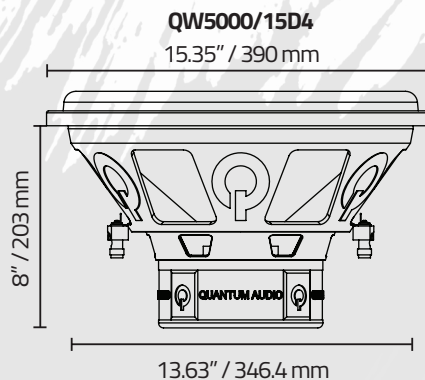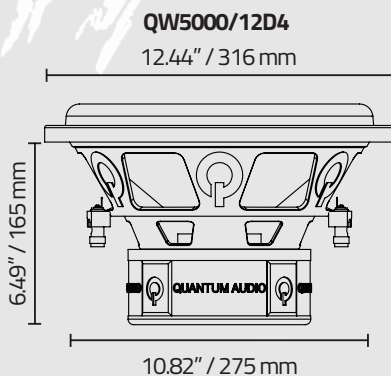



QUANTUM
AUDIO

TM

QRS SERIES LOUDSPEAKERS

Features

- Polypropylene Cone
- Mylar Dome Tweeter
- Ferrite Oxide Magnet
 - Rubber Surround
 - Piezo Super Tweeter

QRS40

4" / 102 mm
3-Way Speaker



120 Watts
MAX POWER

QRS46

4 x 6" / 102 x 152 mm
3-Way Speaker



130 Watts
MAX POWER

QRS50

5.25" / 133 mm
3-Way Speaker



140 Watts
MAX POWER

SPEAKERS	SPEAKER STRUCTURE	MAX POWER	NOMINAL POWER	SENSITIVITY	FREQ. RESPONSE	MAGNET SIZE	M CARTON
QRS40	4" / 102 mm 3-Way Speaker	120 Watts	40 Watts	89dB	50Hz - 25Khz	10 oz Ferrite Oxide Magnet	12
QRS46	4 x 6" / 102 x 152 mm 3-Way Speaker	130 Watts	40 Watts	89dB	75Hz - 25Khz	10 oz Ferrite Oxide Magnet	12
QRS50	5.25" / 133 mm 3-Way Speaker	140 Watts	40 Watts	91dB	50Hz - 25Khz	12 oz Ferrite Oxide Magnet	12



QUANTUM
AUDIO

TM

QRS SERIES LOUDSPEAKERS

Features

- Polypropylene Cone
- Mylar Dome Tweeter
- Ferrite Oxide Magnet
 - Rubber Surround
 - Piezo Super Tweeter

QRS57

5 x 7" / 127 x 178 mm
3-Way Speaker



180 Watts
MAX POWER

QRS65

6.5" / 165 mm
3-Way Speaker



180 Watts
MAX POWER

QRS69

6 x 9"
152 x 229 mm
4-Way Speaker



200 Watts
MAX POWER

SPEAKERS	SPEAKER STRUCTURE	MAX POWER	NOMINAL POWER	SENSITIVITY	FREQ. RESPONSE	MAGNET SIZE	M CARTON
QRS65	6.5" / 165 mm 3-Way Speaker	180 Watts	60 Watts	91dB	45Hz - 25Khz	15 oz Ferrite Oxide Magnet	10
QRS57	5 x 7" / 127 x 178 mm 3-Way Speaker	180 Watts	60 Watts	91dB	45Hz - 25Khz	15 oz Ferrite Oxide Magnet	10
QRS69	6 X 9" / 152 x 229 mm 3-Way Speaker	200 Watts	80 Watts	91dB	35Hz - 28Khz	18 oz Ferrite Oxide Magnet	4



QUANTUM
AUDIO

TM

QS SERIES LOUDSPEAKERS

QS57

5X7" / 127X177.8mm

3-WAY SPEAKER



200Watts
MAX POWER

Features

- Mylar Cone
- Piezo Tweeter
- Rubber Surround
- Ferrite Oxide Magnet

QS65

6.5" / 165mm

3-WAY LOUDSPEAKERS

200Watts
MAX POWER





QUANTUM
AUDIO

TM

QS SERIES LOUDSPEAKERS



250Watts
MAX POWER

QS69

6X9" / 152.4X228.6mm
3-WAY SPEAKERS



INCLUDES GRILL

SPEAKERS	SPEAKER STRUCTURE	IMPEDANCE	MAX POWER	RMS POWER	SENSITIVITY	MAGNET	M CARTON
QS57	5 x 7" 3-Way Speaker	4Ω	200 Watts	55 Watts	88dB	Ferrite Magnet	10
QS65	6.5" 3-Way Speaker	4Ω	200 Watts	55 Watts	91dB	Ferrite Magnet	8
QS69	6 x 9" 3-Way Speaker	4Ω	250 Watts	75 Watts	89.5dB	Ferrite Magnet	4



QUANTUM
AUDIO

TM

TWEETERS

QS1TW

- 1" / 25 mm Swivel Dome Tweeter
- Peak Power: 350 Watts
- Nominal Power: 175 Watts
- Multiple Mounting Applications
- High Performance
- Easy Installation
- Blister Package
- **Master Carton: 60 pcs**



QB1ST

- 1" / 25 mm Mylar Dome Tweeter
 - Peak Power: 350 Watts
 - Nominal Power: 175 Watts
 - Neo Magnet
- **Master Carton: 30 pcs**

QS2TW

- 1" / 25 mm Directional Mount Tweeter
- Peak Power: 375 Watts
- Nominal Power: 185 Watts
- **Master Carton: 60 pcs**





QUANTUM
AUDIO

TM

HIGH EFFICIENCY LOUDSPEAKERS


NEW 2024

QPRO65CD

- Loudspeaker with rear loded compression driver
- 1.5" High output TIL midrange voice coil
- Peak Power: 500 Watts
- Nominal Power: 250 Watts
- Kit includes: 1 pair of loud speakers
- **Master Carton: 4 pcs**



500 Watts
MAX POWER

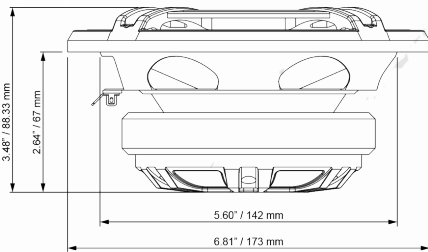

CUSTOM PROTECTIVE GRILL INCLUDED

700 Watts
MAX POWER

NEW 2024

QPRO8CD

- 8" High Efficiency 2-way Loudspeaker with rear loaded compression driver
- 1.5" High output TIL midrange voice coil
 - Weather treated cone design
- Compression style 1" Aluminum Tweeter
 - Treated cloth surround
 - Impedance: 4Ω
- Peak Power: 700 Watts
- Nominal Power: 350 Watts
- Kit includes: 1 pair loudspeakers
- **Master Carton: 2 pcs**



CUSTOM PROTECTIVE GRILL INCLUDED



QUANTUM
AUDIO

TM

NEW 2024


QPRO69CD

- Loudspeaker with rear loded compression driver
- 1.5" High output TIL midrange voice coil
 - Peak Power: 700 Watts
 - Nominal Power: 350 Watts
- Kit includes: 1 pair loudspeakers
- **Master Carton: 2 pcs**



700 Watts
MAX POWER

CUSTOM PROTECTIVE GRILL INCLUDED

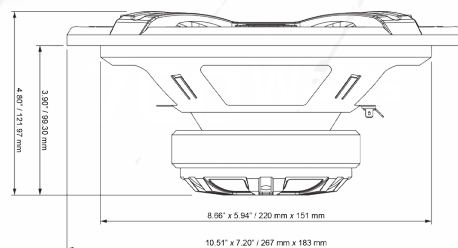

Q5X 65CD

6.5" / 165cm

2-WAY HIGH EFFICIENCY LOUDSPEAKERS



Features

- 1" Aluminum Compression Style Tweeter
- Element Rated Cone Design
- Bi-Ribbed Treated Cloth Surround
- 1.5" High Output Til Midrange Voice
- Protective Grill Included
- **Master Carton: 4 pcs**


Specifications

- Dynamic Power Handling: 500 Watts
- Nominal Power Handling: 250 Watts
- Frequency Response: 90Hz - 18KHz
- Impedance: 4Ω
- Sensitivity: 102.7dB

Dimensions

- Mounting Depth: 2.83" / 70 mm
- Cutout Diameter: 5.6" / 142 mm

500 Watts
MAX POWER



contact us: 877 787 0101



QUANTUM
AUDIO

TM

Q5X SERIES LOUDSPEAKERS



700 Watts
MAX POWER



Q5X8CD

8" HIGH EFFICIENCY 2-WAY LOUDSPEAKERS

Features

- 8" High Efficiency 2 Way Loudspeaker
- 1" Aluminum Compression Style Tweeter
 - Element Rated Cone Design
 - Bi-Ribbed Treated Cloth Surround
- 1.5" High Output Til Midrange Voice Coil
 - Protective Grill Included
- **Master Carton: 2 pcs**

Specifications

- Dynamic Power Handling: **700 Watts**
- Nominal Power Handling: 350 Watts
- Frequency Response: 85Hz - 18KHz
 - Impedance: 4Ω
 - Sensitivity: 102.9dB

Dimensions

- Mounting Depth: 3.09" / 78.7 mm
- Cutout Diameter: 6.91" / 175.69 mm

Q5X69CD

6X9" HIGH EFFICIENCY
2-WAY LOUDSPEAKERS

Features

- 6 x 9" High Efficiency 2 way Loudspeaker
- 1" Aluminum Compression Style Tweeter
- Element Rated Cone Design
- Bi-Ribbed Treated Cloth Surround
- 1.5" High Output Til Midrange Voice Coil
- Protective Grill Included
- **Master Carton: 2 pcs**

Dimensions

- Mounting Depth: 3.98" / 101.3 mm
- Cutout Diameter: 8.66 x 5.94"
(220 mm x 151 mm)

Specifications

- Dynamic Power Handling: **700 Watts**
- Nominal Power Handling: 350 Watts
- Frequency Response: 80Hz - 18KHz
- Impedance: 4 Ω
- Sensitivity: 103.2dB



700 Watts
MAX POWER





QUANTUM
AUDIO

TM

PRO AUDIO TWEETERS


QPROTW3

HIGH EFFICIENCY SHALLOW MOUNT ALUMINUM COMPRESSION TWEETER

Features

- 1" Aluminum dome compression tweeter
- Shallow mount
- Ferrite Oxide Magnet
- Dynamic power: 500 Watts
- Nominal power: 250 Watts
- Kit includes: 1 pair tweeters
- **Master Carton: 12 pcs**

NEW 2024

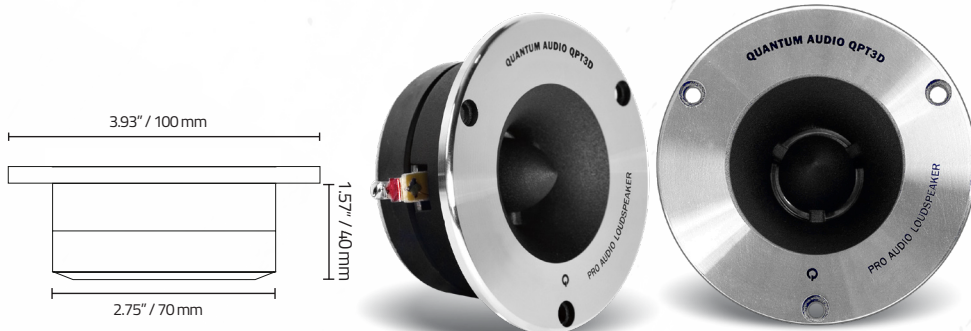

QPT3D

- 3.93" / 100 mm Aluminum Pro Audio Tweeter
- 1.57" / 39.87 mm Tweeter Voice Coil
- Peak Power: **300 Watts**
- Nominal Power: 150 Watts
- Sold in Pairs
- **Master Carton: 12 pcs**

QPCD200

- Phenolic Horn Tweeter Design
- Extended Frequency Response
- Peak Power: **200 Watts**
- Nominal Power: 150 Watts
- High Efficiency
- Wide Dispersion Horn Lens
- Sold as Single
- **Master Carton: 12 pcs**



QPSM8V4 PRO AUDIO MIDRANGES

Features

- High Efficiency Mid-High Frequency
- Shallow Mount Application
- Multi Application Use
- Cloth Surround
- 1.5" / 38.1 mm High Temperature Voice Coil
- Custom Embossed Grill
- Sold as singles



PRO AUDIO

((MID RANGE))

INCLUDES GRILL

SPEAKERS	SPEAKER STRUCTURE	MAX POWER	NOMINAL POWER	SENSITIVITY	FREQ. RESPONSE	IMPEDANCE	M CARTON
QPSM6v4	6.5" / 165 mm	300 Watts	175 Watts	91.8 dB@1w/1m SPL	80Hz - 18 kHz	4Ω	8
QPSM6v8	6.5" / 165 mm	300 Watts	175 Watts	91.8 dB@1w/1m SPL	80Hz - 18 kHz	4Ω	8
QPSM8v4	8" / 203 mm	350 Watts	200 Watts	94.4 dB@1w/1m SPL	75Hz - 18 kHz	8Ω	6
QPSM8v8	8" / 203 mm	350 Watts	200 Watts	94.4 dB@1w/1m SPL	75Hz - 18 kHz	8Ω	6



QM65PRO4

6.5"/165mm PRO AUDIO MIDRANGE

Features

- 4Ω
- Shallow Mount Stamped Basket
- 1" Aluminum Dome Tweeter
- Barrium Ferrite Magnet
- 1.5" / 38.1 mm Voice Coil
- Cloth Paper Surround
- Dynamic Power: 250 Watts
- Nominal Power: 150 Watts
- **Master Carton: 6**



QUANTUM
AUDIO

TM

NEW 2024

QPRO6K

HIGH EFFICIENCY COMPONENT SYSTEM

1000 Watts
MAX POWER



INCLUDES GRILL

Features

- 1" Aluminum compression tweeter
- 6.5" shallow mount high output midrange
 - 1.5" high output TIL midrange coil
 - Tweeter dynamic power: 500 Watts
 - Tweeter nominal power: 250 Watts
- Midrange dynamic power: 500 Watts
- Midrange nominal power: 250 Watts
- Kit includes: 1 pair tweeters / 1 pair midrange
 - Master Carton: 4 pcs

QPRO6K4MT

HIGH EFFICIENCY DUAL COMPONENT SYSTEM

Features

- 1" Aluminum compression tweeter
- 6.5" shallow mount high output midrange
- 1.5" high output TIL midrange coil
- Tweeter dynamic power: 500 Watts
- Tweeter nominal power: 250 Watts
- Midrange dynamic power: 500 Watts
- Midrange nominal power: 250 Watts
- Kit includes: 2 pair tweeters / 2 pair midrange
- Master Carton: 2 pcs

NEW 2024

2000 Watts
MAX POWER



INCLUDES GRILLS

contact us: 877 787 0101



QUANTUM
AUDIO

TM



QANL-4K

4 GA. ANL AMPLIFIER INSTALLATION KIT



KIT CONTENTS

- 17' (5.2M) Orange/Black Soft Touch RCA Cable
- 17' (5.2M) 4 Ga. Orange Soft Touch Power Cable
 - 17' (5.2M) 18Ga. Blue Remote Wire
- 17' (5.2M) 16Ga. Orange/Gray Soft Touch Speaker Cable
 - 3' (0.9M) 4 Ga. Gray Soft Touch Ground Cable
 - ANL Heat Resistant Fuse Holder
 - 60 Amp ANL Fuse
 - Split loom
- Accessories: Wire Ties, Ring Terminals, Butt Connectors, Spades, Grommet
- **Master Carton: 4 pcs**

QMANL-8K

8 GA. MINI ANL AMPLIFIER INSTALLATION KIT

KIT CONTENTS

- 17' (5.2M) Orange/Black Soft Touch RCA Cable
- 17' (5.2M) 4 Ga. Orange Soft Touch Power Cable
- 17' (5.2M) 18Ga. Blue Remote Wire
- 17' (5.2M) 16Ga. Orange/Gray Soft Touch Speaker Cable
- 3' (0.9M) 4 Ga. Gray Soft Touch Ground Cable
- Mini ANL Heat Resistant Fuse Holder
- 40 Amp Mini ANL Fuse
- Split loom
- Accessories: Wire Ties, Ring Terminals, Butt Connectors, Spades, Grommet
- **Master Carton: 12 pcs**





QUANTUM
AUDIO

TM

SUBWOOFER AMPLIFIER COMPATIBILITY CHART

SUBWOOFER	NUMBER OF SUBWOOFERS	RECOMMENDED AMPLIFIER OPTION 1	RECOMMENDED AMPLIFIER OPTION 2
QWX4000/ 8D4	2 Subs @ 1Ω	QRX2501	QPX3000.1D
QWX4000/10D4	2 Subs @ 1Ω	QRX2501	QPX3000.1D
QWX4000/12D4	2 Subs @ 1Ω	QRX4001	QPX3000.1D
QWX4000/15D4	2 Subs @ 1Ω	QRX4001	QPX4000.1D
QWX2000/10D4	2 Subs @ 1Ω	QPX3000.1D	QPX2500.1D
QWX2000/12D4	2 Subs @ 1Ω	QPX3000.1D	QEA2500.1
QW5000/12D4	2 Subs @ 1Ω	QPX5000.1D	QRX4001
QW5000/15D4	2 Subs @ 1Ω	QPX5000.1D	QRX4001
QW3000/ 8D4	2 Subs @ 1Ω	QPX2501	QPX3000.1D
QW3000/12D4	2 Subs @ 1Ω	QPX2501	QPX3000.1D
QW3000/15D4	2 Subs @ 1Ω	QPX3000.1D	QRX4001
QW1000/10D4	1 Sub @ 2Ω	QEA1500.1	QPX2000.1M
QW1000/10S4	2 Subs @ 2Ω	QPX2000.1M	QEA1500.1
QW1000/12D4	1 Sub @ 2Ω	QEA1500.1	QPX2000.1M
QW1000/12S4	2 Subs @ 2Ω	QPX2000.1M	QEA1500.1



Feel The Rush!



302 Hanmore Industrial Parkway/Harlingen, TX 78550

Toll Free: (877) 787-0101 Fax: (956) 421-4513

sales@dbdrive.net

Printed in China

QCAT23A