

EUPHORIA™

XPERT™

LOUDSPEAKERS • SUBWOOFERS • AMPLIFIERS



2024-2025
PRODUCT GUIDE

XPERT™

TABLE OF CONTENTS

AMPLIFIERS

AMPLIFIERS

NEW EX100.4, EX200.4, EX300.4, EX1500.1, EX3000.1 **4-7**

MINI AMPLIFIERS

EXM400.4, EXM900.4, EXM2000.1, EXM3000.1 **8-9**

AMPLIFIERS

EX5K, EX4.5 **10-11**

LOUDSPEAKERS

NEO XL CARBON SERIES

EX8NCD-CFXL **12-13**

NEO CARBON SERIES

EX6NCD-CF, EX8NCD-CF, EX8SNCD-CF **14-16**

NEO CARBON POINT SOURCE SERIES

NEW EX5NPS-CF, EX6NPS-CF, EX8NPS-CF **17-19**

EX69NPS-CF, EX57NPS-CF **20-21**

NEO COMPRESSION DRIVER WITH PAPER SERIES

EX6NCD, EX69NCD, EX8NCD, EX10NCD **22-25**

NEO DIE-CAST WITH PAPER SERIES

EX6NCX, EX69NCX **26-27**

SUBWOOFERS

NEO CARBON FIBER SUBWOOFER

EXW8NCF, EXW10NCF **28-29**

NEO CARBON FIBER FLAT SUBWOOFER

NEW EXFW10NCF, EXW12NCF **30-31**

MID-RANGE SPEAKERS

NEO MID-BASS

EX10NMB-CFXL, EX8NMB-CF 32-33

EX10NMB 34

NEO CARBON FIBER MID-RANGE

EXM6N-CF, EXM8N-CF, EXM8SN-CF 35-37

NEO DIE-CAST MID-RANGE

EXM5N, EXM6N, EXM8N, EXM10N 38-41

NEO SEALED BACK MID-RANGE

EXM6NSB, EXM8NSB 42-43

NEO STAMPED MID-RANGE

EXM6SN, EXM8SN, EXM10SN 44-47

TWEETERS

NEODYMIUM SERIES

EXT1.5NH, EXT1NH, EXT1NB, EXT2NB 48-51

ACCESSORIES

AERO PORT KIT

NEW EXPF3 52-53

ANL FUSE HOLDER

PSMANL4 54

SPEAKER WIRE HARNESS

DBLHDH1 54

ICON GLOSSARY 55



XPERT™ AMPLIFIERS



NEW
2024



**FULL RANGE
CLASS D
TECHNOLOGY**



**PRECISION
POTENTIOMETER**
**PREAMP
CONTROLS**



EX200.4 4 CHANNEL AMPLIFIER

EX100.4 4 CHANNEL AMPLIFIER

COMPACT DESIGN EXTENSIVE POWER



**BUFFERED FULL RANGE
RCA PASS THROUGH OUTPUTS**



**DIRECT CONNECT
SPEAKER TERMINALS**



**AUDIO PROTECTION
CIRCUIT**



**AUDIOPHILE GRADE
TIFFANY RCA CONNECTORS**



**LARGE GAUGE
POWER WIRE INPUTS**




**CHASSIS HEAT
MANAGEMENT**

*ICON DETAILS ON PAGE 55

4 CHANNEL AMPLIFIERS

Amplifiers	Internal Circuitry	4Ω @ 14.4 Volts	2Ω @ 14.4 Volts	1Ω @ 14.4 Volts	4Ω (Bridged)	Master Carton
EX100.4	4 Channel Class D	4 x 50 Watts	4 x 100 Watts	N/A	2 x 200 Watts	5
EX200.4	4 Channel Class D	4 x 200 Watts	4 x 300 Watts	N/A	2 x 400 Watts	5
EX300.4	4 Channel Class D	4 x 300 Watts	4 x 400 Watts	4 x 500 Watts	2 x 600 Watts	5

SPECIFICATIONS

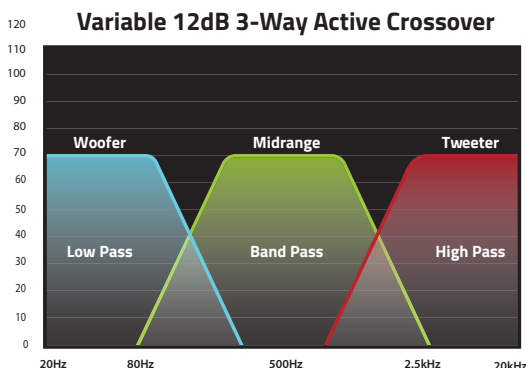

	EX100.4	EX200.4	EX300.4
Working Voltage	11-15.2 Volts	11-15.2 Volts	11-15.2 Volts
Frequency Response	10Hz - 20KHz	10Hz - 20KHz	10Hz - 20KHz
Signal to Noise Ratio	<85dB	<95dB	<95dB
Damping Factor	100dB<	150dB<	150dB<
Low Level Input	6V - 0.2V	6V - 0.2V	6V - 0.2V
High Pass Filter Variable	20Hz - 5KHz	20Hz - 5KHz	20Hz - 5KHz
Low Pass Filter Variable	50Hz - 5KHz	50Hz - 5KHz	50Hz - 5KHz
Minimum Working Impedance	2Ω Stereo	2Ω Stereo	1Ω Stereo
Dimensions	5" x 5.20" x 2.50"	7.45" x 5.20" x 2.50"	9" x 5.20" x 2.50"
	127 x 132.08 x 63.5mm	190 x 132.08 x 63.5mm	230 x 132.08 x 63.50 mm



XPERT™ AMPLIFIERS



NEW
2024



**FULL RANGE
CLASS D
TECHNOLOGY**



**PRECISION
POTENTIOMETER
PREAMP
CONTROLS**



COMPACT DESIGN EXTENSIVE POWER



**BUFFERED FULL RANGE
RCA PASS THROUGH OUTPUTS**



**DIRECT CONNECT
SPEAKER TERMINALS**



**AUDIO PROTECTION
CIRCUIT**



**AUDIOPHILE GRADE
TIFFANY RCA CONNECTORS**



**LARGE GAUGE
POWER WIRE INPUTS**



**CHASSIS HEAT
MANAGEMENT**

*ICON DETAILS ON PAGE 55


FULL RANGE MONO AMPLIFIERS

Amplifiers	Internal Circuitry	4Ω @ 14.4 Volts	2Ω @ 14.4 Volts	1Ω @ 14.4 Volts	Master Carton
EX1500.1	Full Range Class D Mono	1 x 325 Watts	1 x 750 Watts	1 x 1500 Watts	5
EX3000.1	Full Range Class D Mono	1 x 750 Watts	1 x 1500 Watts	1 x 3000 Watts	5

SPECIFICATIONS

	EX1500.1	EX3000.1
Working Voltage	11-15.2 Volts	11-15.2 Volts
Frequency Response	10 - 20KHz	10 - 20KHz
Signal to Noise Ratio	<90dB	<90dB
Damping Factor	125dB<	125dB<
Low Level Input	6V - 0.2V	6V - 0.2V
High Pass Filter Variable	20Hz-800Hz/200Hz-8KHz	20Hz-800Hz/200Hz-8KHz
Low Pass Filter Variable	50Hz-800Hz/500Hz-8KHz	50Hz-800Hz/500Hz-8KHz
Minimum working Impedance	1Ω	1Ω
Dimensions	9" x 5.20" x 2.50" 230 x 133 x 64 mm	10" x 5.20" x 2.50" 254 x 133 x 64 mm

Variable 12dB 3-Way Active Crossover

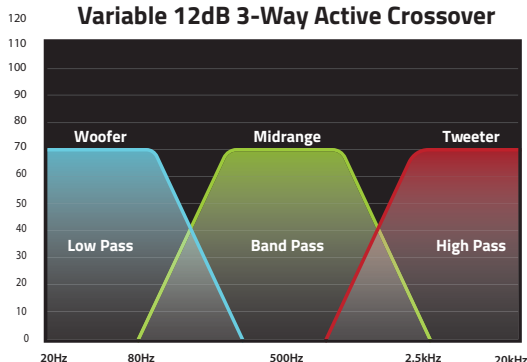

XPERT™ MINI

A M P L I F I E R S



HIGH EFFICIENCY FULL RANGE CLASS D TECHNOLOGY



**SIGNAL EVALUATION
STATUS INDICATOR**



**AUDIO PROTECTION
CIRCUIT**



**ADAPTIVE CROSSOVER
TECHNOLOGY**



**CHASSIS HEAT
MANAGEMENT**




**DIRECT CONNECT
SPEAKER TERMINALS**



**LARGE GAUGE
POWER WIRE INPUTS**

Variable 12dB 3-Way Active Crossover

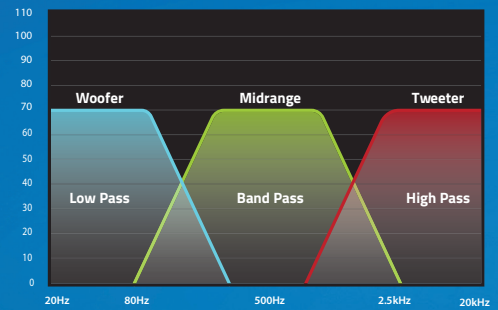

*ICON DETAILS ON PAGE 55





EXM400.4
4 CHANNEL AMPLIFIER



EXM2000.1
MONO AMPLIFIER



EXM900.4
4 CHANNEL AMPLIFIER



EXM3000.1
MONO AMPLIFIER

4 CHANNEL AMPLIFIER

Amplifiers	Internal Circuitry	4Ω @ 14.4 Volts	2Ω @ 14.4 Volts	4Ω @ Bridged	Capability	Master Carton
EXM400.4	4 Channel Class D	4 x 200 Watts	4 x 400 Watts	2 x 800 Watts	2Ω Stereo	6
EXM900.4	4 Channel Class D	4 x 450 Watts	4 x 900 Watts	2 x 1800 Watts	2Ω Stereo	5

MONO AMPLIFIER

Amplifiers	Internal Circuitry	4Ω @ 14.4 Volts	2Ω @ 14.4 Volts	1Ω	Capability	Master Carton
EXM2000.1	Full Range Class D	1 x 500 Watts	1 x 1000 Watts	1 x 2000 Watts	1Ω	5
EXM3000.1	Full Range Class D	1 x 750 Watts	1 x 1500 Watts	1 x 3000 Watts	1Ω	4

SPECIFICATIONS

	EXM400.4	EXM900.4	EXM2000.1	EXM3000.1
Working Voltage	10-16 Volts	10-16 Volts	10-16 Volts	10-16 Volts
Frequency Response	10 - 24KHz	10 - 24KHz	10 - 22KHz	10 - 22KHz
Signal to Noise Ratio	<85dB	<85dB	<90dB	<90dB
Damping Factor	100dB<	100dB<	125dB<	125dB<
Low Level Input	6V - 0.2V	6V - 0.2V	6V - 0.2V	6V - 0.2V
Variable High Pass Filter	20Hz - 8KHz	20Hz - 8KHz	20Hz - 8KHz	20Hz - 8KHz
Variable Low Pass Filter	50Hz - 8KHz	50Hz - 8KHz	50Hz - 8KHz	50Hz - 8KHz
Minimum working Impedance	2Ω	2Ω	1Ω	1Ω
Dimensions	9.5" x 4.68" x 2.11"	11" x 4.68" x 2.11"	10.63" x 4.68" x 2.11"	14.18" x 4.68" x 2.11"
	241.3 x 119 x 53.75 mm	279.4 x 119 x 53.75 mm	270 x 119 x 53.75 mm	360.172 x 119 x 53.75 mm





XPERT™ AMPLIFIERS



COMPACT DESIGN EXTENSIVE POWER



**BUFFERED FULL RANGE
RCA PASS THROUGH OUTPUTS**



**DIRECT CONNECT
SPEAKER TERMINALS**



**AUDIO PROTECTION
CIRCUIT**



**AUDIOPHILE GRADE
TIFFANY RCA CONNECTORS**



**LARGE GAUGE
POWER WIRE INPUTS**



**CHASSIS HEAT
MANAGEMENT**


*ICON DETAILS ON PAGE 55

FULL RANGE MONO AMPLIFIER

Amplifier	Internal Circuitry	4Ω @ 14.4 Volts	2Ω @ 14.4 Volts	1Ω @ 14.4 Volts	Master Carton
EX5K	Class D Monoblock	1 x 1250 Watts	1 x 2500 Watts	1 x 5000 Watts	3


**FULL RANGE
CLASS D
TECHNOLOGY**

SPECIFICATIONS

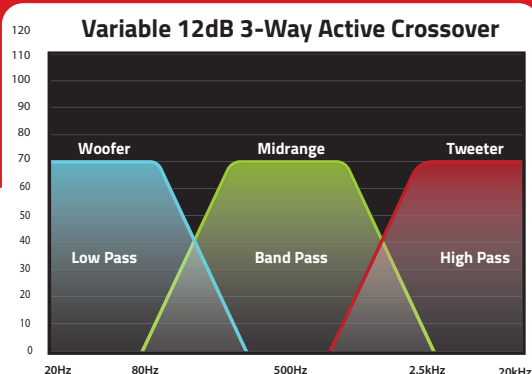

	EX5K
Working Voltage	10-16 Volts
Frequency Response	20 - 35KHz
Signal to Noise Ratio	<95dB
Damping Factor	150dB<
Low Level Input	6V - 0.2V
High Pass Filter Variable	20Hz - 8KHz
Low Pass Filter Variable	50Hz - 8KHz
Minimum working Impedance	1Ω
Dimensions	12.5" x 6.9" x 2.11" 320 x 174.4 x 53.6 mm

**PRECISION
POTENTIOMETER
PREAMP
CONTROLS**

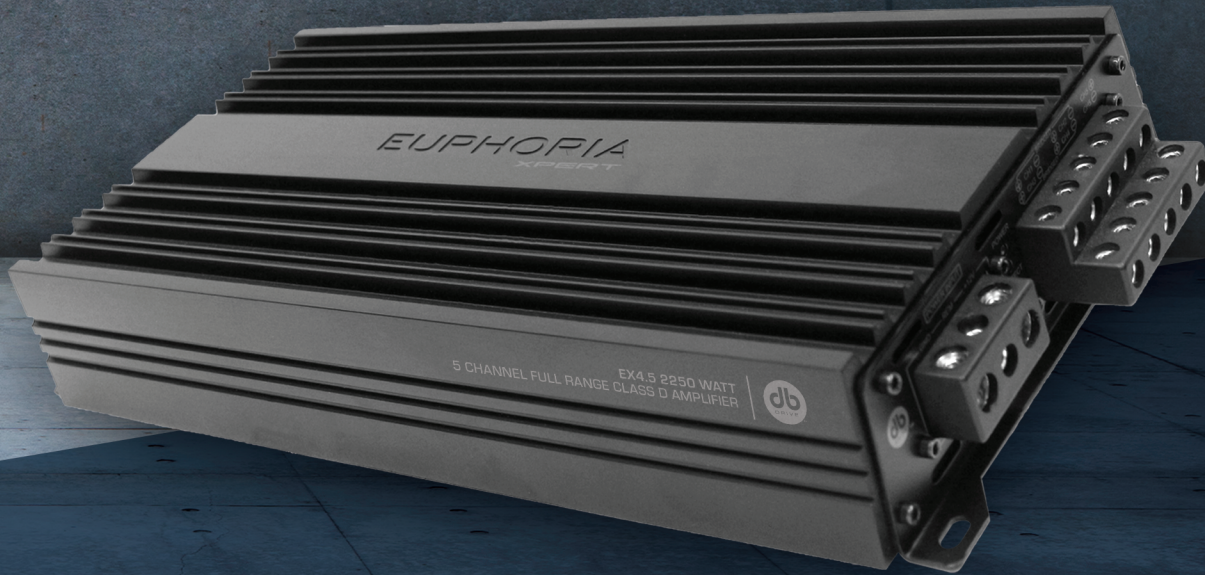


MULTI CHANNEL AMPLIFIER

Amplifier	Internal Circuitry	4Ω @ 14.4 Volts	2Ω @ 14.4 Volts	Capability	Master Carton
EX4.5	Class D - 5 Channel	4 x 200 Watts +1 x 725 Watts	4 x 400 Watts +1 x 1000 Watts	2Ω Stereo	3

SPECIFICATIONS

	EX4.5
Working Voltage	10-16 Volts
Frequency Response	20Hz - 30KHz (Ch 1-4) 10Hz - 5000Hz (Ch 5)
Signal to Noise Ratio	<62dB
Damping Factor	100dB<
Low Level Input	6V - 0.2V
High Pass Filter Variable	20Hz - 500Hz (Ch 1-4)
Low Pass Filter Variable	20Hz - 500Hz (Ch 1-4) 50Hz - 500Hz (Ch 5)
Minimum working Impedance	2Ω
Dimensions	13" x 6.9" x 2.11" 330 x 175 x 54 mm

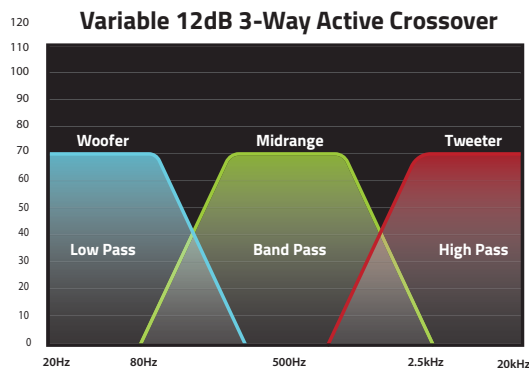

XPERT™

NEO CARBON SERIES

XPERT™ CARBON SERIES

Loudspeakers feature unique IP-rated characteristics that ensure great music doesn't stop even when the weather does. The infused resin fiber compression manufacturing process ensures that the carbon XPERT™ cones are built to endure all environments while still being lightweight enough to perform above the competition.






EX8NCD-CFXL

**8" 2-WAY CARBON FIBER LOUDSPEAKER
WITH BACKLOADED COMPRESSION DRIVER**

- Neodymium Ring Magnet Assembly
- Rear Mounted Full Sized Compression Driver
- IP54 Rated Weather Resistant Carbon Fiber Cone
- Die-Cast Aluminum Basket with Radial Venting
- 1.4"(36mm) Polyester Tweeter Diaphragm
- Wide Dispersion Conical HF Waveguide
- 12dB Passive Crossover Included
- Protective Grills Included

Frequency Response

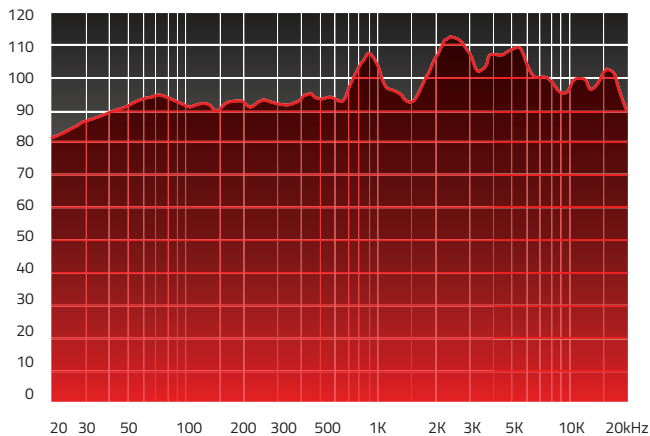

Nominal Basket Size	8.6" (219.7 mm)
Mounting Depth	4.57" (116.30 mm)
Cutout Diameter	7" (179.64 mm)
Voice Coil Diameter	2" (51 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber
Basket Type	Die-Cast Aluminum
Power Handling	650 W
Dynamic Wattage	1250 W
Frequency Response	50Hz - 20KHz
Sensitivity @ 1W/1M	89.2dB
Impedance	5.2Ω
Resonant Frequency (fs)	48.1Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	6.62
Electromagnetic Q (QES)	0.43
Total Q (QTS)	0.41
Compliance Volume (Vas)	21.0L
Mech Compliance of Suspension (CMS)	0.33 mm/N
Replacement Recone	EX8NCD-CFXL-MRC
Replacement Tweeter Diaphragm	EXNCD-RC
Master Carton	2
Sold As	Pair

XPERT™

NEO CARBON SERIES




- Neodymium Magnet Assembly
- Rear Mounted Full Sized Compression Driver
- IP54 Rated Weather Resistant Carbon Fiber Cone
- Die-Cast Aluminum Basket with Radial Venting
- 1.4"(36mm) Polyester Tweeter Diaphragm
- Wide Dispersion Conical HF Waveguide
- 12dB Passive Crossover Included
- Protective Grills Included

EX6NCD-CF

6.5" 2-WAY CARBON FIBER LOUDSPEAKER WITH BACKLOADED COMPRESSION DRIVER

Frequency Response

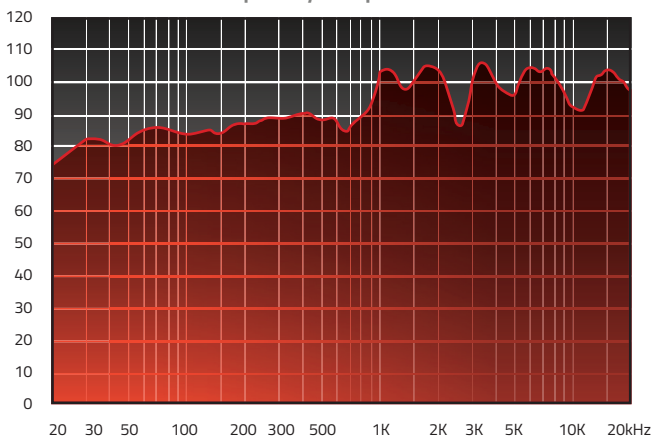


Nominal Basket Size	6.5" (165.1 mm)
Mounting Depth	3.51" (86.64 mm)
Cutout Diameter	5.75" (146 mm)
Voice Coil Diameter	2" (51 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber
Basket Type	Die-Cast Aluminum
Power Handling	400 W
Dynamic Wattage	800 W
Frequency Response	60Hz - 20KHz
Sensitivity @ 1W/1M	105.7 dB
Impedance	5.2Ω
Resonant Frequency (fs)	61.2Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	4.82
Electromagnetic Q (QES)	0.32
Total Q (QTS)	0.30
Compliance Volume (Vas)	6.3L
Mech Compliance of Suspension (CMS)	0.28 mm/N
Replacement Recone	EX6NCD-CF-MRC
Replacement Tweeter Diaphragm	EXNCD-RC
Master Carton	2
Sold As	Pair



- Neodymium Ring Magnet Assembly
- Rear Mounted Full Sized Compression Driver
- IP54 Rated Weather Resistant Carbon Fiber Cone
- Die-Cast Aluminum Basket with Radial Venting
- 1.4"(36mm) Polyester Tweeter Diaphragm
- Wide Dispersion Conical HF Waveguide
- 12dB Passive Crossover Included
- Protective Grills Included

EX8NCD-CF

8" 2-WAY CARBON FIBER LOUDSPEAKER
WITH BACKLOADED COMPRESSION DRIVER

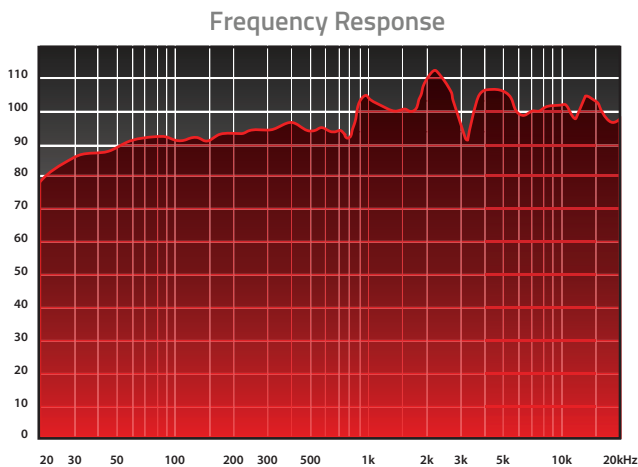

Nominal Basket Size	8" (203.2 mm)
Mounting Depth	4.30" (109.47 mm)
Cutout Diameter	7" (179.64 mm)
Voice Coil Diameter	2" (51 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber
Basket Type	Die-Cast Aluminum
Power Handling	450 W
Dynamic Wattage	900 W
Frequency Response	50Hz - 20KHz
Sensitivity @ 1W/1M	105.7 dB
Impedance	4Ω
Resonant Frequency (fs)	66.2Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	6.16
Electromagnetic Q (QES)	0.47
Total Q (QTS)	0.44
Compliance Volume (Vas)	18.1L
Mech Compliance of Suspension (CMS)	0.27 mm/N
Replacement Recone	EX8NCD-CF-MRC
Replacement Tweeter Diaphragm	EXNCD-RC
Master Carton	2
Sold As	Pair

XPERT™

NEO CARBON SERIES




- 2.0" (51mm) Midrange Voice Coil
- Neodymium Ring Magnet Assembly
- Rear Mounted Full Sized Compression Driver
- IP54 Rated Weather Resistant Carbon Fiber Cone with Rubber Surround
- Heavy Gauge Steel Stamped Basket
- 1.4"(36mm) Polyester Tweeter Diaphragm
- Wide Dispersion Conical HF Waveguide
- 12dB Passive Crossover Included
- Protective Grills Included

EX8SNCD-CF

8" 2-WAY CARBON FIBER LOUDSPEAKER
WITH BACKLOADED COMPRESSION DRIVER

Nominal Basket Size	8.6" (219.94 mm)
Mounting Depth	4.2" (107.38 mm)
Cutout Diameter	7" (180.04 mm)
Voice Coil Diameter	2" (51 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber
Basket Type	Heavy Gauge Steel
Power Handling	450 W
Dynamic Wattage	900 W
Frequency Response	50Hz - 20KHz
Sensitivity @ 1W/1M	86.2dB
Impedance	5.2Ω
Resonant Frequency (fs)	76.2Hz
DC resistance (Re)	3.0Ω
Mechanical Q (QMS)	8.87
Electromagnetic Q (QES)	0.68
Total Q (QTS)	0.63
Compliance Volume (Vas)	8.4L
Mech Compliance of Suspension (CMS)	0.13 mm/N
Master Carton	2
Sold As	Pair

Frequency Response

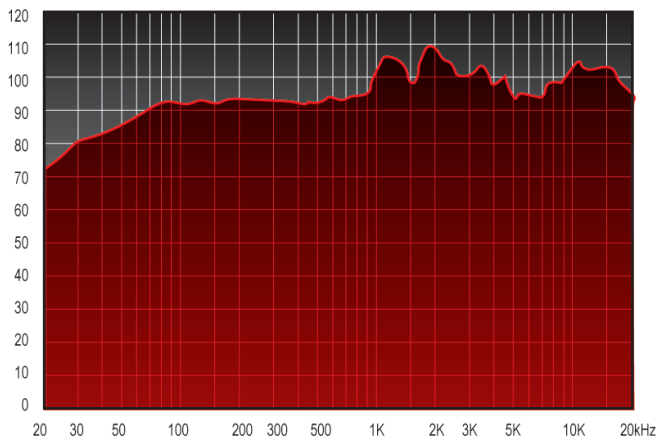




- 1.5" (38.1mm) Midrange voice coil
- High-intensity NEO ring magnet
- IP65-rated weather resistant Carbon fiber cone
- Cloth surround
- Stamped steel basket
- Wide dispersion 1" aluminum dome tweeter
- Protective grills included

EX5NPS-CF

5.25" POINT SOURCE NEO
CARBON FIBER LOUDSPEAKER

Nominal Basket Size	5.26" (133.70 mm)
Mounting Depth	2.40" (61.10 mm)
Cutout Diameter	4.72" (120 mm)
Voice Coil Diameter	1.5" (38.1 mm)
Cone Material	Carbon Fiber
Cone Edge	Treated Cloth
Basket Type	Stamped Steel
Power Handling	200 W
Dynamic Wattage	400 W
Frequency Response	90Hz - 20kHz
Sensitivity @ 1W/1M	91.7 dB
Impedance	4Ω
Resonant Frequency (fs)	101.9Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	6.52
Electromagnetic Q (QES)	0.33
Total Q (QTS)	0.32
Compliance Volume (Vas)	3.0L
Mech Compliance of Suspension (CMS)	0.27 mm/N
Master Carton	6
Sold As	Pair

Frequency Response

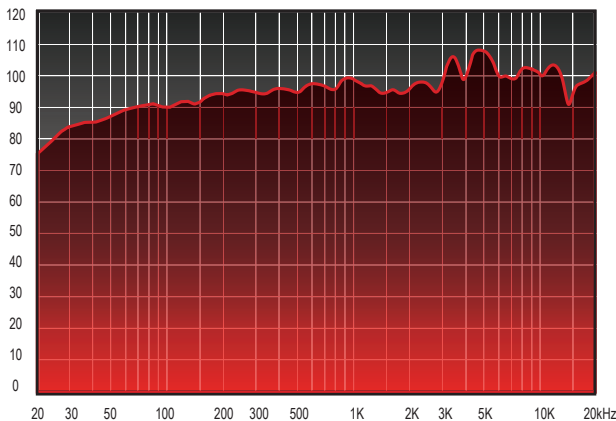

XPERT™

NEO CARBON SERIES




- 1.5" (38.1mm) Midrange voice coil
- High-intensity NEO ring magnet
- IP65-rated weather resistant Carbon fiber cone
- Cloth surround
- Stamped steel basket
- Wide dispersion 1" aluminum dome tweeter
- Protective grills included

EX6NPS-CF

6.5" POINT SOURCE NEO
CARBON FIBER LOUDSPEAKER

Nominal Basket Size	6.9" (173.5 mm)
Mounting Depth	2.8" (71.2 mm)
Cutout Diameter	5.78" (147 mm)
Voice Coil Diameter	1.5" (38.1 mm)
Cone Material	Carbon Fiber
Cone Edge	Treated Cloth
Basket Type	Die-Cast Aluminum
Power Handling	225 W
Dynamic Wattage	450 W
Frequency Response	82.9Hz - 19KHz
Sensitivity @ 1W/1M	90.6 dB
Impedance	4Ω
Resonant Frequency (fs)	82.9Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	7.03
Electromagnetic Q (QES)	0.38
Total Q (QTS)	0.36
Compliance Volume (Vas)	5.0L
Mech Compliance of Suspension (CMS)	0.20 mm/N
Master Carton	4
Sold As	Pair

Frequency Response

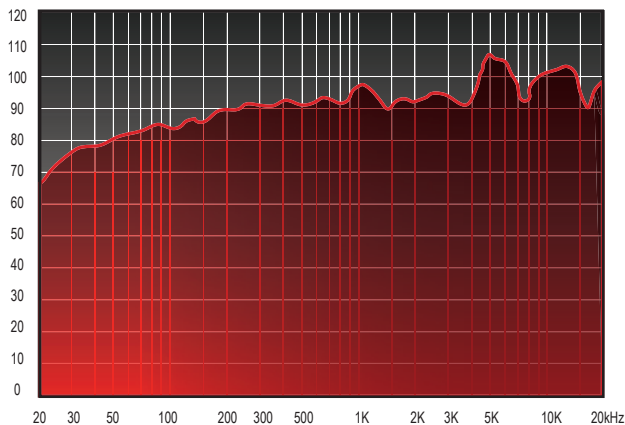




- 1.5" (38.1mm) Midrange voice coil
- High-intensity NEO ring magnet
- IP65-rated weather resistant Carbon fiber cone
- Cloth surround
- Stamped steel basket
- Wide dispersion 1" aluminum dome tweeter
- Protective grills included

EX8NPS-CF

**8" POINT SOURCE NEO
CARBON FIBER LOUDSPEAKER**

Nominal Basket Size	8.63" (219.45mm)
Mounting Depth	3.09" (78.5 mm)
Cutout Diameter	7.08" (180mm)
Voice Coil Diameter	1.5" (38.1 mm)
Cone Material	Carbon Fiber
Cone Edge	Treated Cloth
Basket Type	Stamped Steel
Power Handling	275 W
Dynamic Wattage	500 W
Frequency Response	80Hz - 19kHz
Sensitivity @ 1W/1M	92.3dB
Impedance	4Ω
Resonant Frequency (fs)	62.3Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	5.23
Electromagnetic Q (QES)	0.43
Total Q (QTS)	0.40
Compliance Volume (Vas)	19.6L
Mech Compliance of Suspension (CMS)	0.28 mm/N
Master Carton	4
Sold As	Pair

Frequency Response

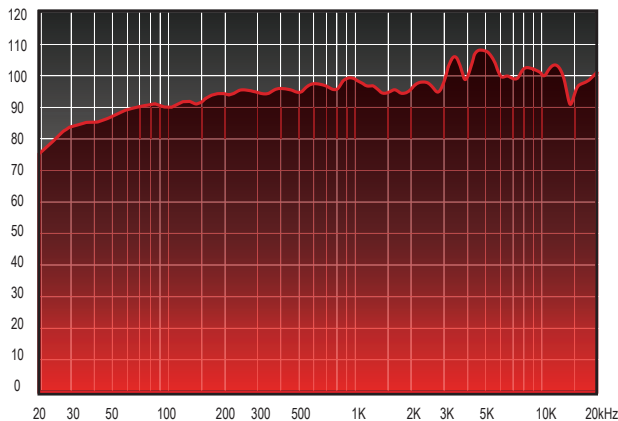

XPERT™

NEO CARBON SERIES




- 1.5" (38.1mm) Midrange voice coil
- High-intensity NEO ring magnet
- IP65-rated weather resistant Carbon fiber cone
- Cloth surround
- Stamped steel basket
- Wide dispersion 1" aluminum dome tweeter
- Protective grills included

EX69NPS-CF

6X9" POINT SOURCE NEO
CARBON FIBER LOUDSPEAKER

Frequency Response

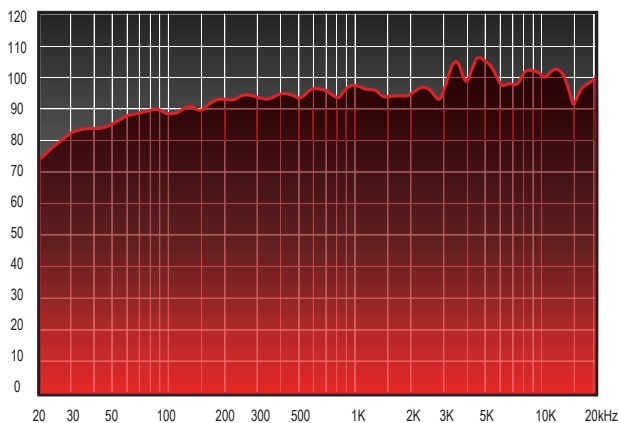

Nominal Basket Size	10.39x7.20" (264x183 mm)
Mounting Depth	3.18" (80.8 mm)
Cutout Diameter	8.66x6.45" (220x164 mm)
Voice Coil Diameter	1.5" (38.1 mm)
Cone Material	Carbon Fiber
Cone Edge	Treated Cloth
Basket Type	Stamped Steel
Power Handling	400 W
Dynamic Wattage	800 W
Frequency Response	77Hz - 19KHz
Sensitivity @ 1W/1M	92 dB
Impedance	4Ω
Resonant Frequency (fs)	68.8Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	9.95
Electromagnetic Q (QES)	0.44
Total Q (QTS)	0.42
Compliance Volume (Vas)	14.1L
Mech Compliance of Suspension (CMS)	0.20 mm/N
Master Carton	4
Sold As	Pair




- 1.5" (38.1mm) Midrange voice coil
- High-intensity NEO ring magnet
- IP65-rated weather resistant Carbon fiber cone
- Cloth surround
- Stamped steel basket
- Wide dispersion 1" aluminum dome tweeter

EX57NPS-CF

5X7" POINT SOURCE NEO
CARBON FIBER LOUDSPEAKER

Nominal Basket Size	7.6"x5.47" (194x139 mm)
Mounting Depth	2.35" (59.9 mm)
Cutout Diameter	7.1"x5" (182x127 mm)
Voice Coil Diameter	1.5" (38.1 mm)
Cone Material	Carbon Fiber
Cone Edge	Treated Cloth
Basket Type	Stamped Steel
Power Handling	225 W
Dynamic Wattage	450 W
Frequency Response	81Hz - 19KHz
Sensitivity @ 1W/1M	93.3 dB
Impedance	4Ω
Resonant Frequency (fs)	90.9Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	8.87
Electromagnetic Q (QES)	0.37
Total Q (QTS)	0.35
Compliance Volume (Vas)	6.8L
Mech Compliance of Suspension (CMS)	0.22 mm/N
Master Carton	4
Sold As	Pair

Frequency Response

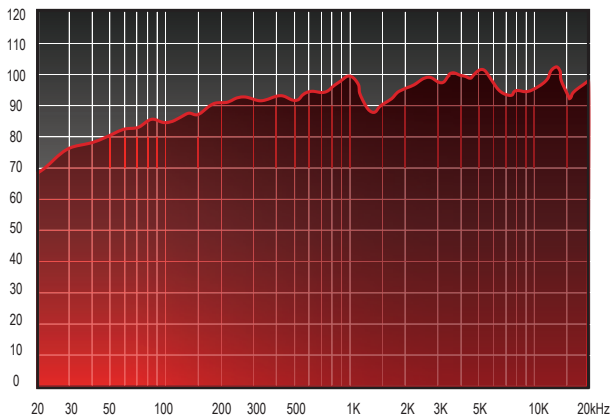

XPERT™

XPERT NEO PAPER SERIES




- PROTECTIVE GRILLS INCLUDED



EX6NCD

6.5" 2-WAY LOUDSPEAKER
WITH BACKLOADED COMPRESSION DRIVER

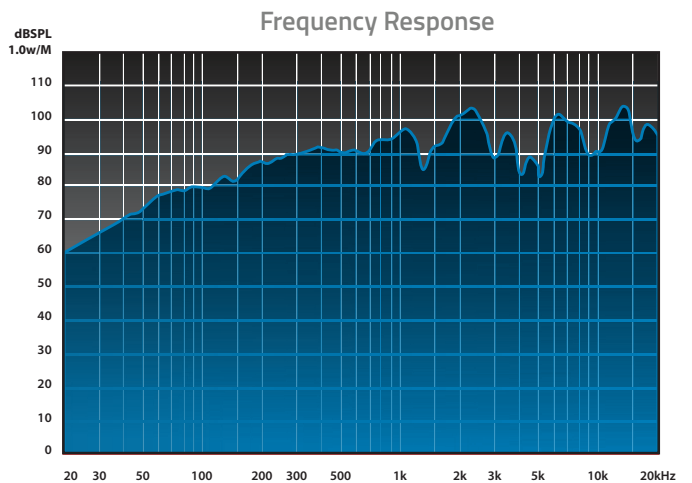

2-WAY LOUDSPEAKERS

- NEODYMIUM RING MAGNET ASSEMBLY
- REAR MOUNTED FULL SIZED COMPRESSION DRIVER
- IP52 RATED PAPER CONE WITH TREATED CLOTH SURROUND
- DIE-CAST ALUMINUM BASKET WITH RADIAL VENTING
- 1.4" (36MM) POLYESTER TWEETER DIAPHRAGM
- WIDE DISPERSION CONICAL HF WAVEGUIDE
- 12DB PASSIVE CROSSOVER INCLUDED


	EX6NCD	EX69NCD
Nominal Basket Size	6.5" (165.1 mm)	6.5" x 9.25" (165mm x 234.95mm)
Mounting Depth	3.41" (86.64 mm)	4.18" (106.17 mm)
Cutout Diameter	5.75" (146 mm)	5.81" x 8.56" (147.57mm x 217.42mm)
Voice Coil Diameter	2" (51mm)	2" (51mm)
Cone Material	Paper	Paper
Cone Edge	Cloth	Cloth
Basket Type	Die-Cast Aluminum	Die-Cast Aluminum
Power Handling	400 W	500 W
Dynamic Wattage	800 W	1000 W
Frequency Response	80Hz - 20KHz	75Hz - 20KHz
Sensitivity @ 1W/1M	105.7dB	93.4dB
Impedance	5.2Ω	5.2Ω
Resonant Frequency (fs)	14.1Hz	78.1Hz
DC resistance (Re)	20.2Ω	3.2Ω
Mechanical Q (QMS)	8.01	10.75
Electromagnetic Q (QES)	0.35	0.35
Total Q (QTS)	0.34	0.34
Compliance Volume (Vas)	1.7L	10.6L
Mech Compliance of Suspension (CMS)	0.16 mm/N	0.15 mm/N
Replacement Recone	EX6NCD-MRC	EX69NCD-MRC
Replacement Tweeter Diaphragm	EXNCD-RC	EXNCD-RC
Master Carton	2	2
Sold As	Pair	Pair



EX69NCD


6.5" 2-WAY LOUDSPEAKER

WITH BACKLOADED COMPRESSION DRIVER

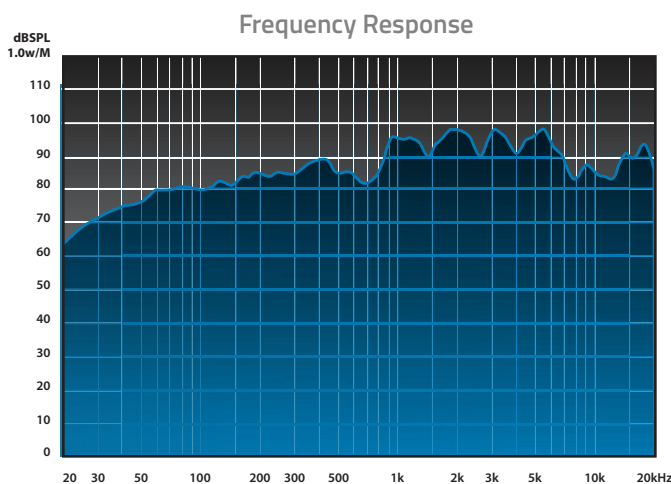

XPERT™

XPERT NEO PAPER SERIES

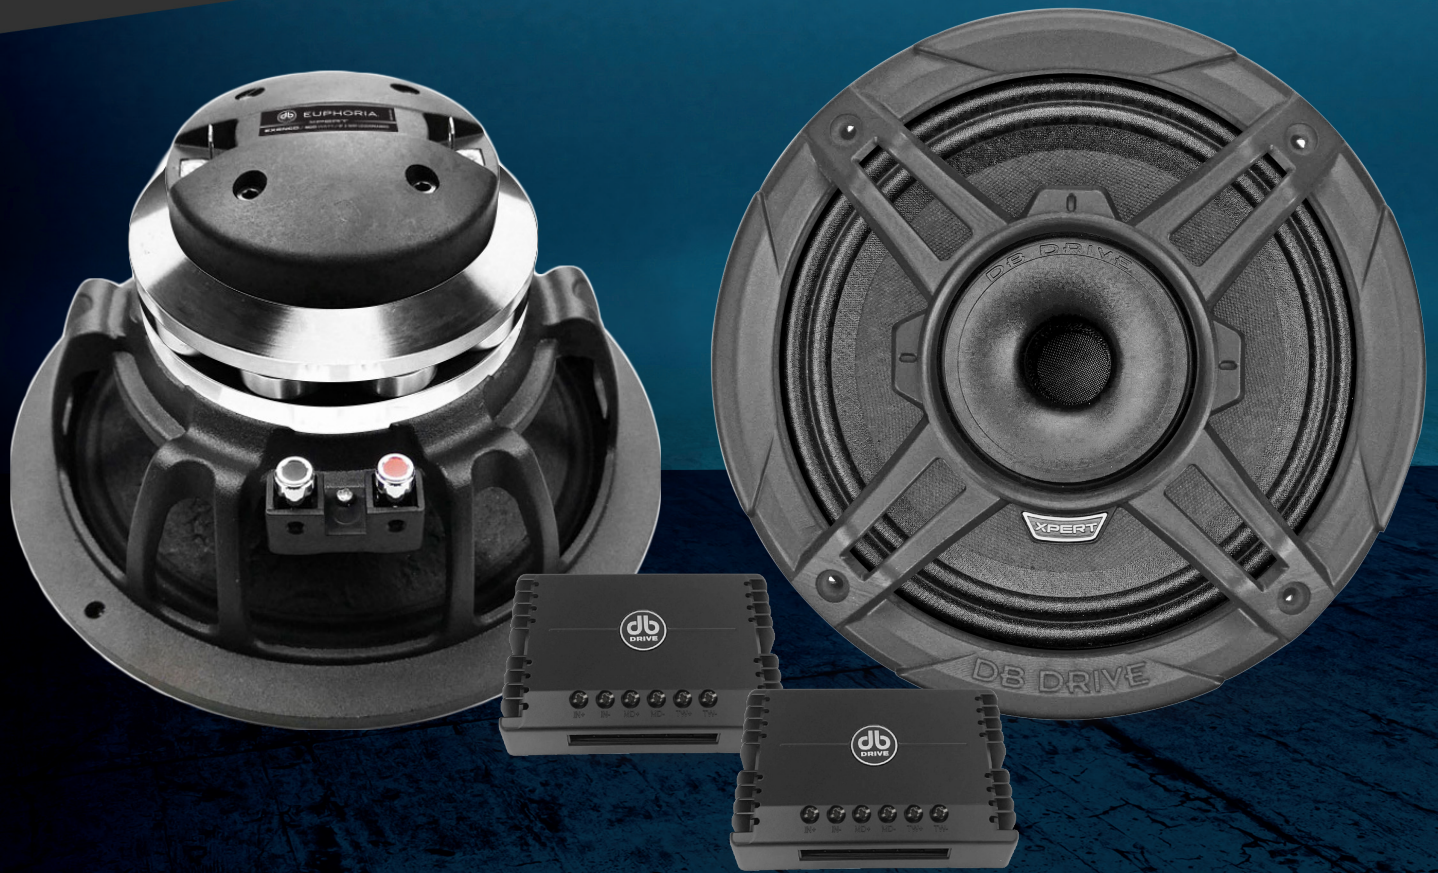


- PROTECTIVE GRILLS INCLUDED



EX8NCD

8" 2-WAY LOUDSPEAKER

WITH BACKLOADED COMPRESSION DRIVER

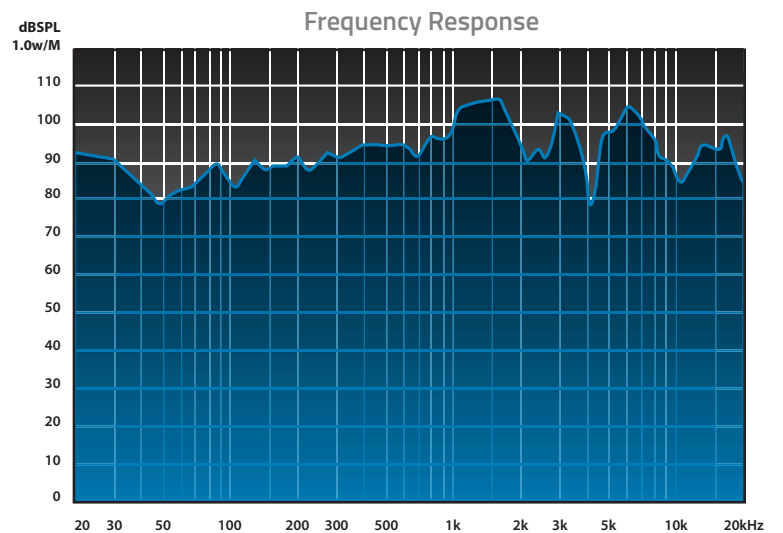

2-WAY LOUDSPEAKERS

- NEODYMIUM RING MAGNET ASSEMBLY
- REAR MOUNTED FULL SIZED COMPRESSION DRIVER
- IP52 RATED PAPER CONE WITH TREATED CLOTH SURROUND
- DIE-CAST ALUMINUM BASKET WITH RADIAL VENTING
- 1.4" (36MM) POLYESTER TWEETER DIAPHRAGM
- WIDE DISPERSION CONICAL HF WAVEGUIDE
- 12DB PASSIVE CROSSOVER INCLUDED

	EX8NCD	EX10NCD
Nominal Basket Size	8" (203.2 mm)	10" (254 mm)
Mounting Depth	4.30" (109.47 mm)	4.68" (118.98 mm)
Cutout Diameter	7.07" (179.64 mm)	9" (230 mm)
Voice Coil Diameter	2" (51mm)	2.5" (63.5mm)
Cone Material	Paper	Paper
Cone Edge	Treated Cloth	Treated Cloth
Basket Type	Die Cast	Die-Cast Aluminum
Power Handling	450 W	500 W
Dynamic Wattage	900 W	1000 W
Frequency Response	75Hz - 20KHz	70Hz - 20KHz
Sensitivity @ 1W/1M	105.4dB	106.1 dB
Impedance	5.2Ω	5.2Ω
Resonant Frequency (fs)	79.7Hz	54.8Hz
DC resistance (Re)	3.2Ω	3.3Ω
Mechanical Q (QMS)	8.24	7.18
Electromagnetic Q (QES)	0.43	0.41
Total Q (QTS)	0.41	0.39
Compliance Volume (Vas)	16.3L	46.9L
Mech Compliance of Suspension (CMS)	0.25 mm/N	0.27 mm/N
Replacement Recone	EX8NCD-MRC	EX10NCD-MRC
Replacement Tweeter Diaphragm	EXNCD RC	EXNCD RC
Master Carton	2	2
Sold As	Pair	Pair

PROTECTIVE GRILLS
INCLUDED




EX10NCD

10" 2-WAY LOUDSPEAKER

WITH BACKLOADED COMPRESSION DRIVER

Contact us: 877-787-0101

Frequency Response

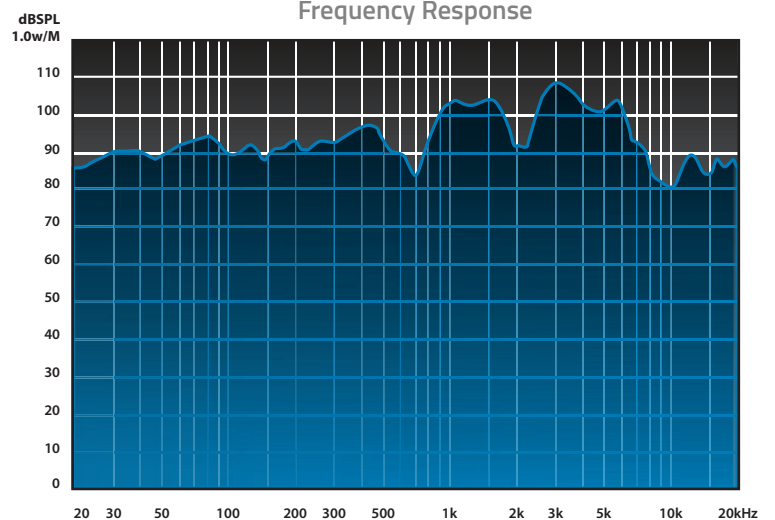

XPERT™

XPERT NEO PAPER SERIES




- PROTECTIVE GRILLS INCLUDED



EX6NCX

6.5" NEODYMIUM SERIES
2-WAY LOUDSPEAKER

Frequency Response

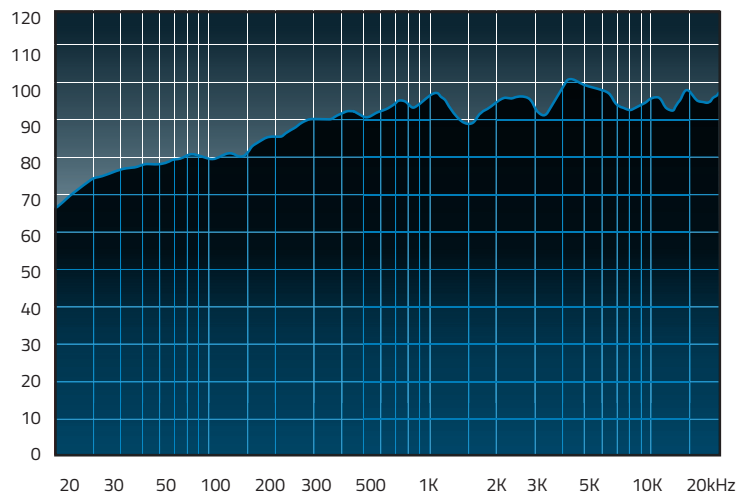

NEODYMIUM 2-WAY LOUDSPEAKERS

- 1.5" (38.1MM) MIDRANGE VOICE COIL
- NEODYMIUM RING MAGNET ASSEMBLY
- P52 RATED WEATHER RESISTANT PAPER CONE WITH CLOTH SURROUND
- DIE-CAST ALUMINUM BASKET WITH RADIAL VENTING
- WIDE DISPERSION 1.25" (28MM) ALUMINUM DOME TWEETER


	EX6NCX	EX69NCX
Nominal Basket Size	6.5" (165.1 mm)	6.5" x 9.25" (165mm x 234.95mm)
Mounting Depth	2.48" (63 mm)	3.31" (84.10 mm)
Cutout Diameter	5.67" (144 mm)	5.81" x 8.56" (147.57mm x 217.42mm)
Voice Coil Diameter	1.5" (38.1mm)	1.5" (38.1mm)
Cone Material	Paper	Paper
Cone Edge	Treated Cloth	Treated Cloth
Basket Type	Die-Cast Aluminum	Die-Cast Aluminum
Power Handling	225 W	400 W
Dynamic Wattage	450 W	800 W
Frequency Response	85Hz - 19KHz	65Hz - 19KHz
Sensitivity @ 1W/1M	97.6 dB	96.5dB
Impedance	4Ω	4Ω
Resonant Frequency (fs)	104.9Hz	92.1Hz
DC resistance (Re)	3.2Ω	3.2Ω
Mechanical Q (QMS)	6.39	5.78
Electromagnetic Q (QES)	0.24	0.33
Total Q (QTS)	0.23	0.31
Compliance Volume (Vas)	7.9L	12.2L
Mech Compliance of Suspension (CMS)	0.28 mm/N	0.18 mm/N
Replacement Recone	EX6NCX-RC	EX69NCX-RC
Replacement Tweeter Diaphragm	EXNCD-RC	EXNCD-RC
Master Carton	4	2
Sold As	Pair	Pair



EX69NCX


6" X 9" NEODYMIUM SERIES
2-WAY LOUDSPEAKER

Frequency Response

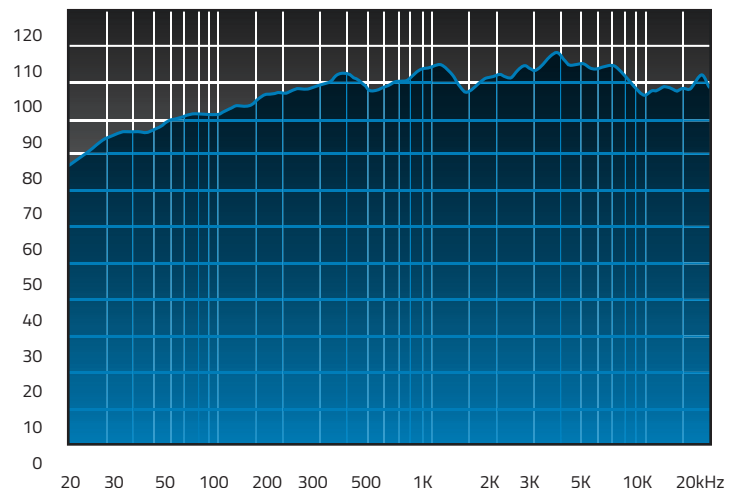


XPER T™

NEO SUBWOOFERS

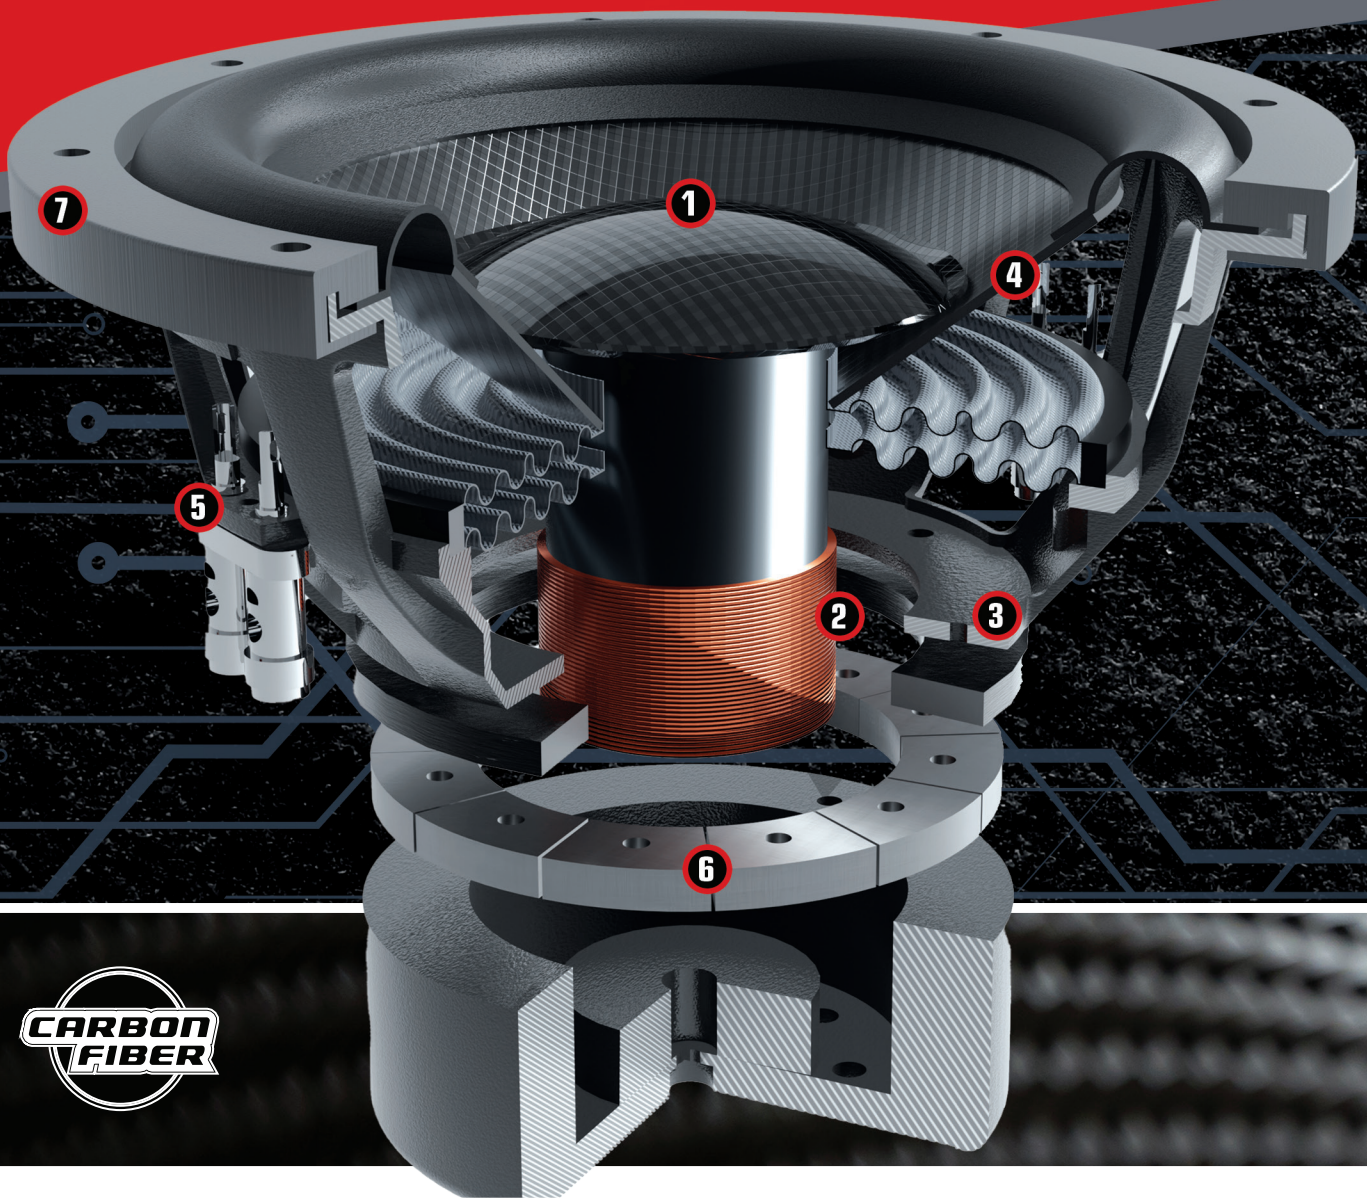

	EXW8NCF	EXW10NCF
Outside Diameter	8.76 (222.56 mm)	10.98" (278.98 mm)
Mounting Depth	5.41" (137.5 mm)	6.25" (159.30 mm)
Cutout Diameter	7.17" (182.31 mm)	9.16" (232.86 mm)
Voice Coil Diameter	2" (51 mm)	2.5" (63.5 mm)
Cone Material	Carbon Fiber	Carbon Fiber
Cone Edge	Rubber Surround	Rubber Surround
Basket Type	Die-Cast Aluminum	Die-Cast Aluminum
Power Handling	1000 W	1250 W
Dynamic Wattage	2000 W	2500 W
Resonant Frequency	52Hz	42.81Hz
Sensitivity @ 1W/1M	82.1dB	82.2dB
Impedance	3.6Ω + 3.6Ω	3.6Ω + 3.6Ω
Master Carton	2	2
Sold As	Single	Single

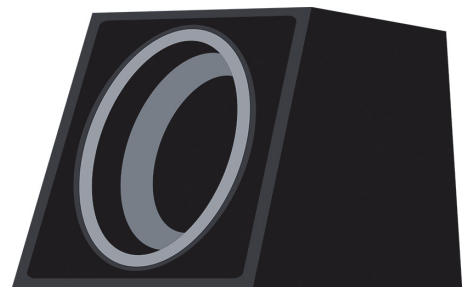

RECOMMENDED AIR SPACE

	EXW8NCF	EXW10NCF
Sealed Box	0.44 cuft. (12.45L)	0.70 cuft. (19.82 L)
Vented Box	0.86 cuft. (24.35L)	0.96 cuft. (27.18 L)
Vent Area	8.29 sq in (53.48 cm ²)	10 sq in (64.51 cm ²)
Vent Length	20 in (50cm)	24 in (61cm)
Tuning	36Hz	35Hz

NEO CARBON FIBER SUBWOOFERS

- 1 CARBON FIBER CONE
- 2 2" DUAL 4 OHM VOICE COIL
- 3 DIE-CAST ALUMINUM BASKET WITH RADIAL VENTING
- 4 WEATHER RESISTANT CONE & SURROUND
- 5 LARGE GAUGE COMPRESSION TERMINALS
- 6 NEODYMIUM RADIAL MAGNET MOTOR
- 7 PROTECTIVE PVC GASKET



EXW8NCF

8" NEO CARBON FIBER SUBWOOFER




EXW10NCF


10" NEO CARBON FIBER SUBWOOFER

XPER™

NEO SUBWOOFERS

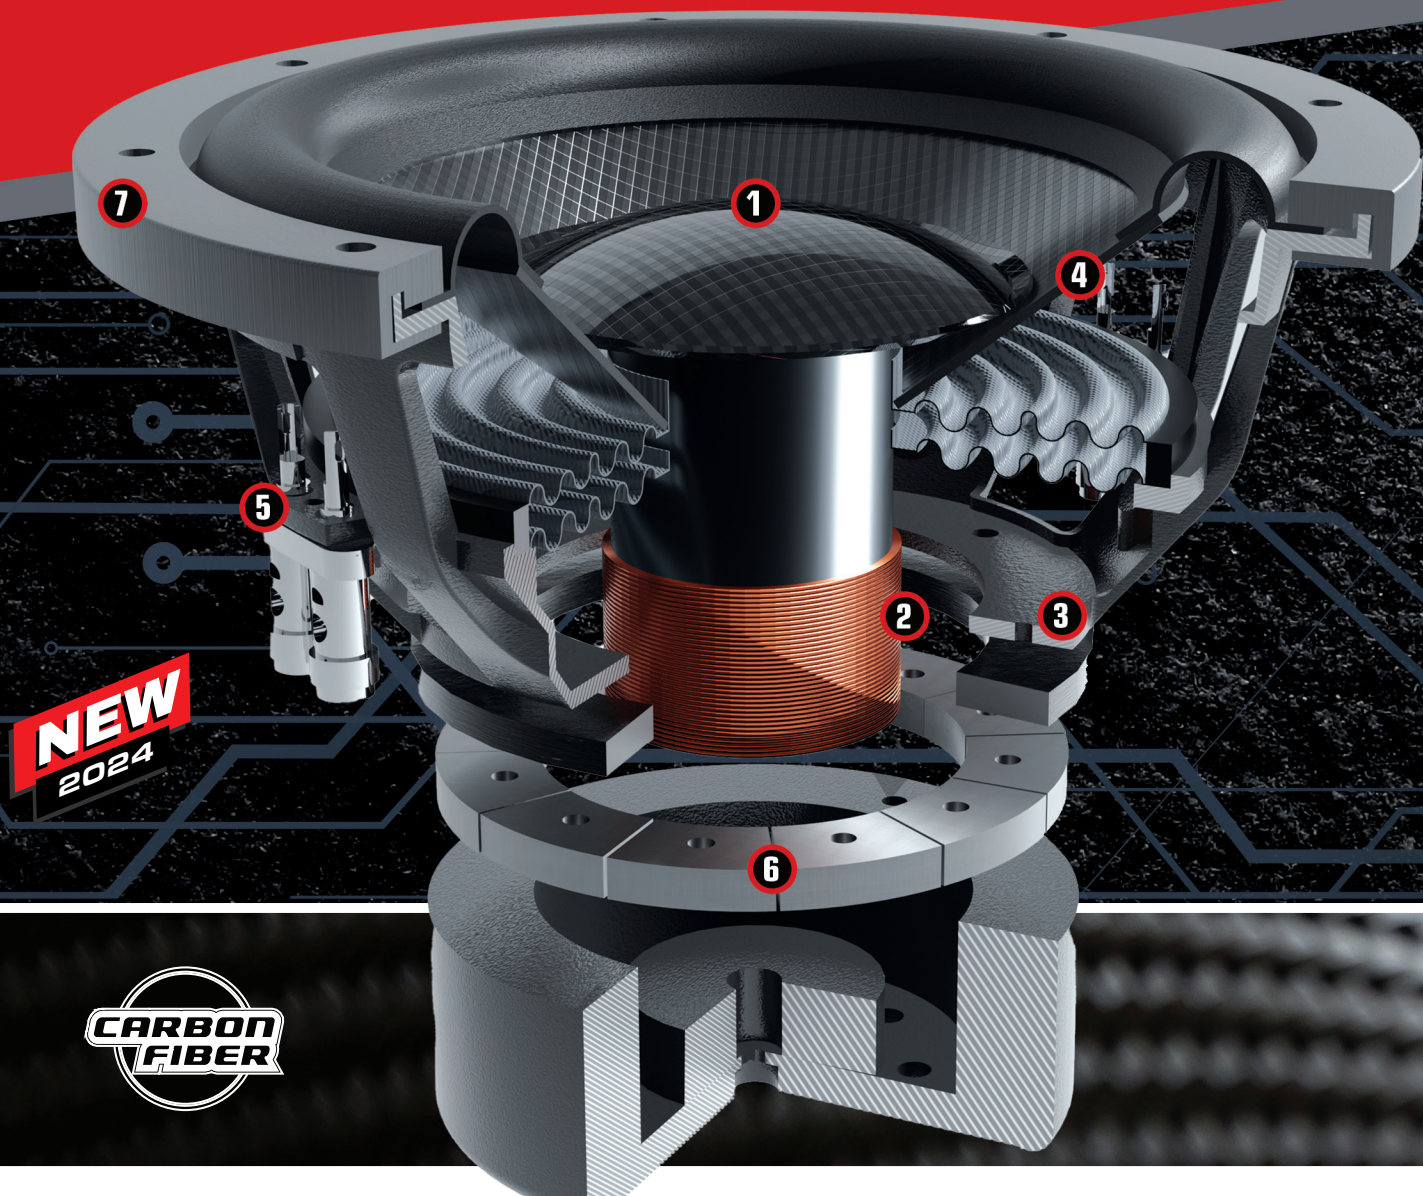

	EXFW10NCF	EXFW12NCF
Outside Diameter	10.83 (275 mm)	12.72" (323 mm)
Mounting Depth	3.54" (89.80 mm)	4.19" (106.30 mm)
Cutout Diameter	9.32" (236.79 mm)	11.5" (292 mm)
Voice Coil Diameter	2.5" (63.5 mm)	2.5" (63.5 mm)
Cone Material	Carbon Fiber	Carbon Fiber
Cone Edge	Rubber Surround	Rubber Surround
Basket Type	Die-Cast Aluminum	Die-Cast Aluminum
Power Handling	400 W	500 W
Dynamic Wattage	1000 W	1200 W
Resonant Frequency	35.813Hz	33.791Hz
Sensitivity @ 1W/1M	84.4dB	86.3dB
Impedance	3.6Ω + 3.6Ω	3.6Ω + 3.6Ω
Master Carton	2	2
Sold As	Single	Single

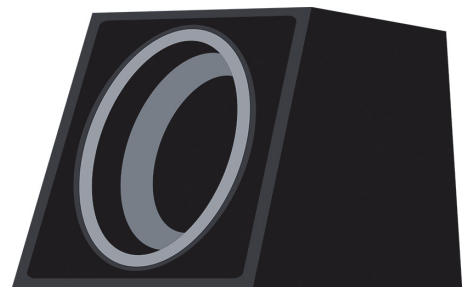

RECOMMENDED AIR SPACE

	EXFW10NCF	EXFW12NCF
Sealed Box	0.55 cuft. (15.57L)	0.92 cuft. (26.05 L)
Vented Box	0.67 cuft. (18.97L)	1.10 cuft. (31.14 L)
Vent Area	7.06 sq in (45.54 cm ²)	9.62 sq in (62.06 cm ²)
Vent Length	24 in (60.96 cm)	18 in (45.72cm)
Tuning	39Hz	39Hz

NEO CARBON FIBER SUBWOOFERS

- 1 CARBON FIBER CONE
- 2 2" DUAL 4 OHM VOICE COIL
- 3 DIE-CAST ALUMINUM BASKET WITH RADIAL VENTING
- 4 WEATHER RESISTANT CONE & SURROUND
- 5 LARGE GAUGE COMPRESSION TERMINALS
- 6 NEODYMIUM RADIAL MAGNET MOTOR
- 7 PROTECTIVE PVC GASKET



EXFW10NCF

10" CARBON FIBER NEO FLAT SUBWOOFER



EXFW12NCF

12" CARBON FIBER NEO FLAT SUBWOOFER

XPERT™

XPERT NEO MIDBASS




- Neodymium Radially Equalized Magnet Assembly
- IP52 Rated Carbon fiber Cone with Treated Rubber Surround
- Die-Cast Aluminum Basket with Radial Venting

EX10NMB-CFXL

10" NEO CARBON FIBER MID-BASS SPEAKER

Nominal Basket Size	10.64" (270.5 mm)
Mounting Depth	4.78" (121.5 mm)
Cutout Diameter	9.29" (236.2 mm)
Voice Coil Diameter	3" (76.2 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber Surround
Basket Type	Die-Cast Aluminum
Power Handling	800W
Dynamic Wattage	1600W
Frequency Response	45Hz - 6000Hz
Sensitivity @ 1W/1M	92dB
Impedance	3Ω
Resonant Frequency (fs)	41Hz
DC resistance (Re)	3Ω
Mechanical Q (QMS)	5.49
Electromagnetic Q (QES)	0.88
Total Q (QTS)	0.76
Compliance Volume (Vas)	14.1L
Mech Compliance of Suspension (CMS)	0.09 mm/N
Replacement Recone	EX10NMB-CFXL-RC
Master Carton	2
Sold As	Single

Frequency Response

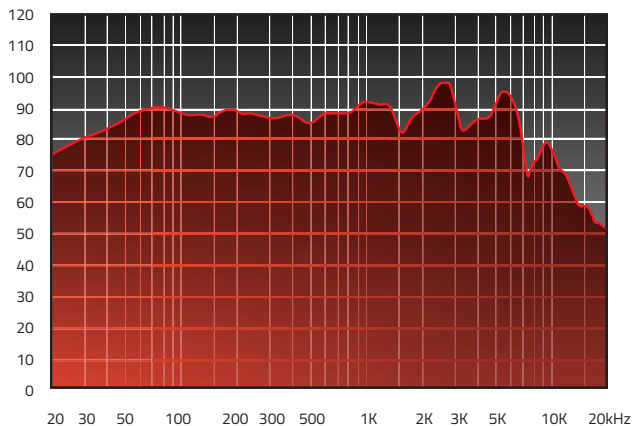




- Neodymium Radially Equalized Magnet Assembly
- IP52 Rated Carbon fiber Cone with Treated Rubber Surround
- Die-Cast Aluminum Basket with Radial Venting

EX8NMB-CF

8" NEO CARBON FIBER MID-BASS SPEAKER

Nominal Basket Size	8.6" (219.94 mm)
Mounting Depth	3.77" (96 mm)
Cutout Diameter	7" (180.32 mm)
Voice Coil Diameter	2" (51 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber Surround
Basket Type	Die-Cast
Power Handling	300 W
Dynamic Wattage	600 W
Frequency Response	48Hz - 20KHz
Sensitivity @ 1W/1M	92dB
Impedance	3Ω
Resonant Frequency (fs)	64 Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	5.65
Electromagnetic Q (QES)	0.69
Total Q (QTS)	0.61
Compliance Volume (Vas)	8.4L
Mech Compliance of Suspension (CMS)	0.13 mm/N
Master Carton	4
Sold As	Single

Frequency Response

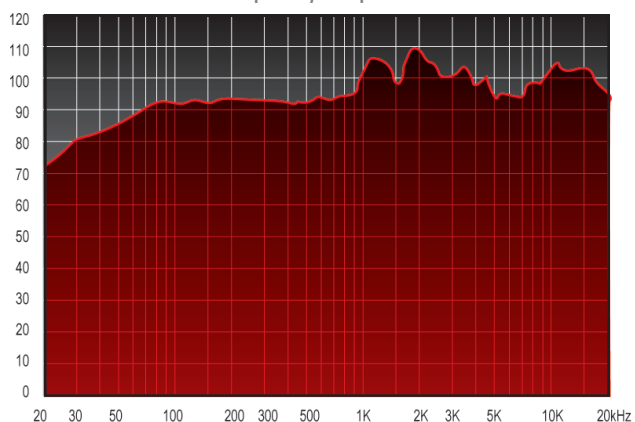

XPERT™

XPERT NEO MIDBASS




- Neodymium 12 Piece Radially Equalized Magnet Assembly
- IP52 Rated Paper Cone with Treated Rubber Surround
- Die-Cast Aluminum Basket with Radial Venting

EX10NMB 10" NEODYMIUM MID-BASS DRIVER

Nominal Basket Size	10" (254 mm)
Mounting Depth	4.27" (108.5 mm)
Cutout Diameter	9" (230 mm)
Voice Coil Diameter	2.5" (63.5mm)
Cone Material	Paper
Cone Edge	Rubber Surround
Basket Type	Die-Cast Aluminum
Power Handling	400 W
Dynamic Wattage	800 W
Frequency Response	45Hz - 2000Khz
Sensitivity @ 1W/1M	92dB
Impedance	3Ω
Resonant Frequency (fs)	40Hz
DC resistance (Re)	3Ω
Mechanical Q (QMS)	2.913
Electromagnetic Q (QES)	0.485
Total Q (QTS)	0.416
Compliance Volume (Vas)	25.94 L
Mech Compliance of Suspension (CMS)	167.735 mm/N
Replacement Recone	EX10NMB-MRC
Replacement Tweeter Diaphragm	EX10NMB RC
Master Carton	4
Sold As	Single

Frequency Response

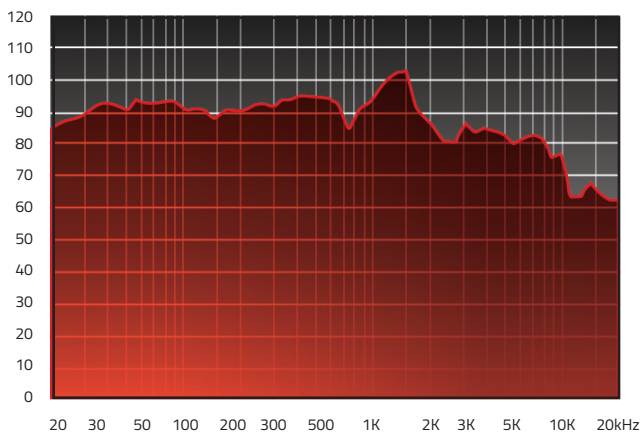




MID-RANGE

- Neodymium 10 Piece Radially Equalized Magnet Assembly
- IP65 Rated Carbon fiber Cone with Treated Rubber Surround
- Die-Cast Aluminum Basket with Radial Venting

EXM6N-CF

6" NEO CARBON FIBER MID-RANGE SPEAKER

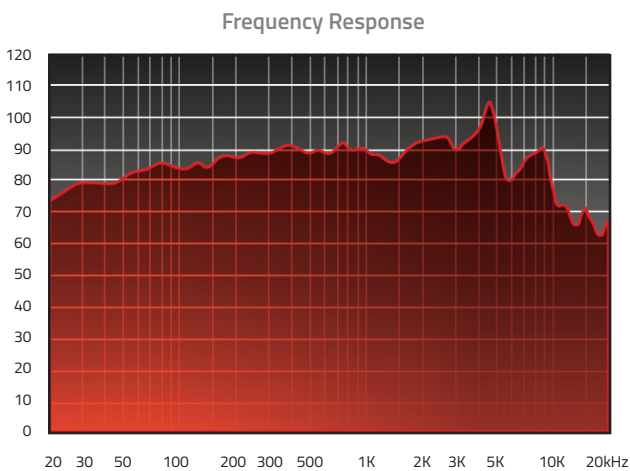

Nominal Basket Size	6.5" (152.4 mm)
Mounting Depth	2.76" (70 mm)
Cutout Diameter	5.71" (145 mm)
Voice Coil Diameter	2" (51 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber Surround
Basket Type	Die-Cast Aluminum
Power Handling	200W
Dynamic Wattage	400W
Frequency Response	60Hz - 11KHz
Sensitivity @ 1W/1M	98.1dB
Impedance	4Ω
Resonant Frequency (fs)	61.2Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	4.82
Electromagnetic Q (QES)	0.32
Total Q (QTS)	0.30
Compliance Volume (Vas)	6.3L
Mech Compliance of Suspension (CMS)	0.28 mm/N
Replacement Recone	EXM6N-CF RC
Master Carton	6
Sold As	Single

XPERT™

XPERT NEO MID-RANGE




- Neodymium Radially Equalized Magnet Assembly
- IP65 Rated Carbon fiber Cone with Treated Rubber Surround
- Die-Cast Aluminum Basket with Radial Venting

EXM8N-CF

8" NEO CARBON FIBER MID-RANGE SPEAKER

Nominal Basket Size	8" (203.2 mm)
Mounting Depth	3.46" (88 mm)
Cutout Diameter	7.09" (180 mm)
Voice Coil Diameter	2" (51 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber Surround
Basket Type	Die-Cast Aluminum
Power Handling	300 W*
Dynamic Wattage	600 W
Frequency Response	50Hz - 12KHz
Sensitivity @ 1W/1M	99.7dB
Impedance	4Ω
Resonant Frequency (fs)	51.4Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	7.53
Electromagnetic Q (QES)	0.39
Total Q (QTS)	0.37
Compliance Volume (Vas)	18.2L
Mech Compliance of Suspension (CMS)	0.27 mm/N
Replacement Recone	EXM8N-CF RC
Master Carton	4
Sold As	Single

Frequency Response

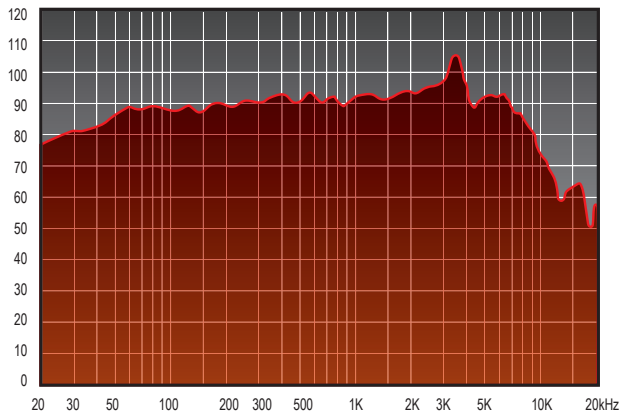




- 2" (51 mm) Midrange Voice Coil
- 10 Neodymium Ring Magnet Assembly
- IP65 Rated Weather Resistant Carbon Fiber Cone with Rubber Surround
- Heavy Gauge Stamped Steel Basket

EXM8SN-CF

8" NEO CARBON FIBER MID-RANGE SPEAKER

Nominal Basket Size	8" (203.2 mm)
Mounting Depth	3.43" (87 mm)
Cutout Diameter	7.13" (181 mm)
Voice Coil Diameter	2" (51 mm)
Cone Material	Carbon Fiber
Cone Edge	Rubber Surround
Basket Type	Steel Stamped
Power Handling	300 W*
Dynamic Wattage	600 W
Frequency Response	50Hz - 12KHz
Sensitivity @ 1W/1M	99.7dB
Impedance	4Ω
Resonant Frequency (fs)	74.4Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	8.81
Electromagnetic Q (QES)	0.54
Total Q (QTS)	0.51
Compliance Volume (Vas)	8.0L
Mech Compliance of Suspension (CMS)	0.13 mm/N
Master Carton	4
Sold As	Single

Frequency Response

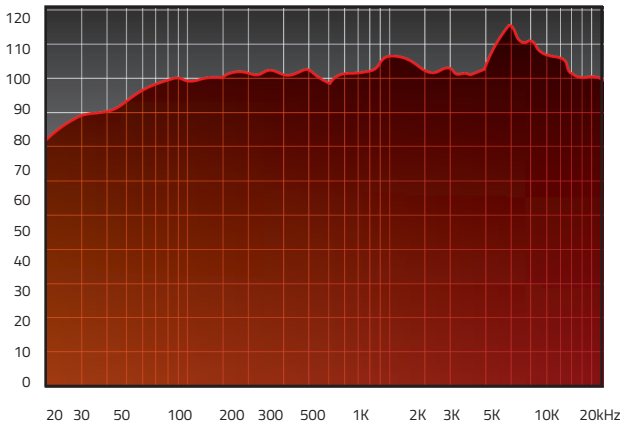

XPERT™


XPERT NEO MID-RANGE



EXM5N

5.25" NEODYMIUM SERIES
MID-RANGE

Frequency Response

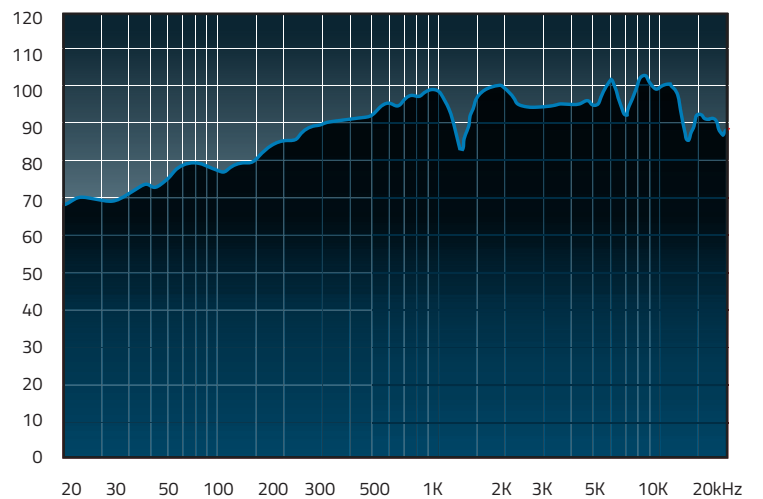

NEODYMIUM SERIES

MID-RANGE SPEAKERS


- NEODYMIUM RADIALLY EQUALIZED MAGNET ASSEMBLY
- IP52 RATED PAPER CONE WITH TREATED CLOTH SURROUND
- DIE-CAST ALUMINUM BASKET WITH RADIAL VENTING

	EXM5N	EXM6N
Nominal Basket Size	5.25" (165.1 mm)	6.5" (165.1 mm)
Mounting Depth	2.6" (66 mm)	2.76" (70 mm)
Cutout Diameter	4.65" (118 mm)	5.71" (145 mm)
Voice Coil Diameter	1.5" (38.1mm)	2" (51mm)
Cone Material	Paper	Paper
Cone Edge	Treated Cloth	Treated Cloth
Basket Type	Die-Cast Aluminum	Die-Cast Aluminum
Power Handling	175 W	200 W
Dynamic Wattage	350 W	400 W
Frequency Response	145Hz - 8KHz	85Hz - 11KHz
Sensitivity @ 1W/1M	96.3 dB	98.1 dB
Impedance	4Ω	4Ω
Resonant Frequency (fs)	182.2Hz	110.2Hz
DC resistance (Re)	3Ω	3Ω
Mechanical Q (QMS)	9.42	5.9
Electromagnetic Q (QES)	0.45	0.36
Total Q (QTS)	0.43	0.32
Compliance Volume (Vas)	1.3Lv	4.6L
Mech Compliance of Suspension (CMS)	0.12 mm/N	0.19 mm/N
Replacement Tweeter Diaphragm	EXM5N RC	EXM6N RC
Master Carton	8	6
Sold As	Single	Single



EXM6N
6.5" NEODYMIUM SERIES
MID-RANGE

Frequency Response

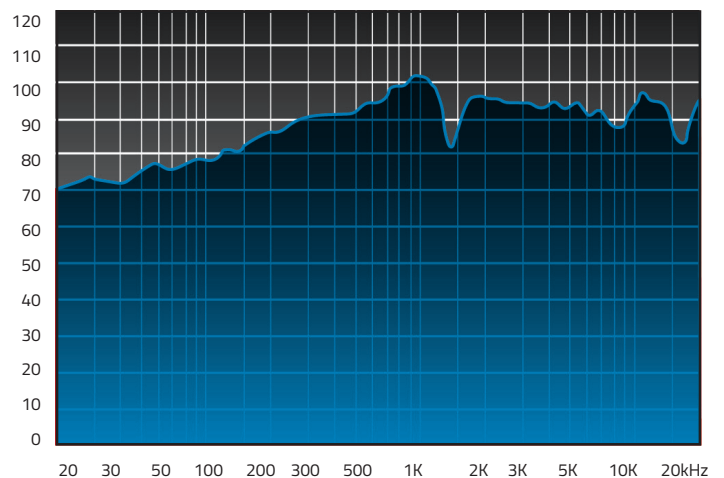

XPERT™


XPERT NEO MID-RANGE



EXM8N

8" NEODYMIUM SERIES
MID-RANGE

Frequency Response

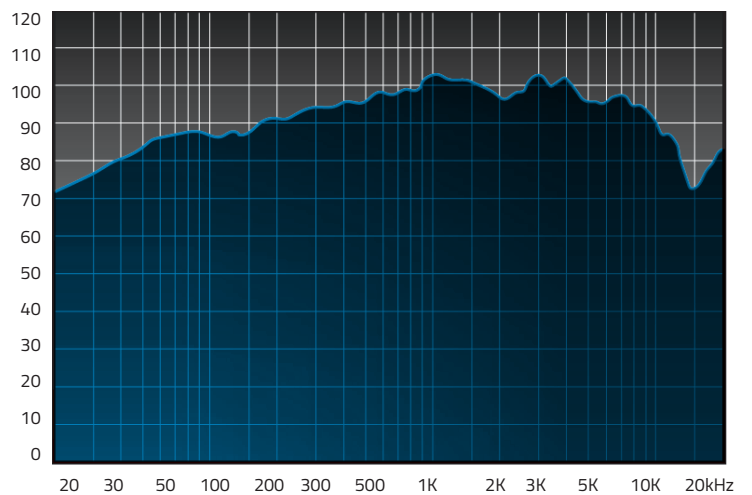

NEODYMIUM SERIES MID-RANGE SPEAKERS

- NEODYMIUM RADIALLY EQUALIZED MAGNET ASSEMBLY
- IP52 RATED PAPER CONE WITH TREATED CLOTH SURROUND
- DIE-CAST ALUMINUM BASKET WITH RADIAL VENTING


	EXM8N	EXM10N
Nominal Basket Size	8" (203.2 mm)	10" (254 mm)
Mounting Depth	3.46" (88 mm)	3.9" (99 mm)
Cutout Diameter	7.09" (180 mm)	9.06" (230 mm)
Voice Coil Diameter	2" (51 mm)	2.5" (63.5 mm)
Cone Material	Paper	Paper
Cone Edge	Treated Cloth	Treated Cloth
Basket Type	Die-Cast Aluminum	Die-Cast Aluminum
Power Handling	300 W	400 W
Dynamic Wattage	600 W	800 W
Frequency Response	80Hz - 12KHz	75Hz - 12KHz
Sensitivity @ 1W/1M	99.7 dB	102.1 dB
Impedance	4Ω	4Ω
Resonant Frequency (fs)	71.3Hz	71.7Hz
DC resistance (Re)	3.2Ω	3.2Ω
Mechanical Q (QMS)	3.11	2.2
Electromagnetic Q (QES)	0.31	0.44
Total Q (QTS)	0.28	0.37
Compliance Volume (Vas)	24.8L	38.1L
Mech Compliance of Suspension (CMS)	0.37 mm/N	0.22 mm/N
Replacement Tweeter Diaphragm	EXM8N RC	EXM10N RC
Master Carton	4	4
Sold As	Single	Single



EXM10N

10" NEODYMIUM SERIES
MID-RANGE

Frequency Response

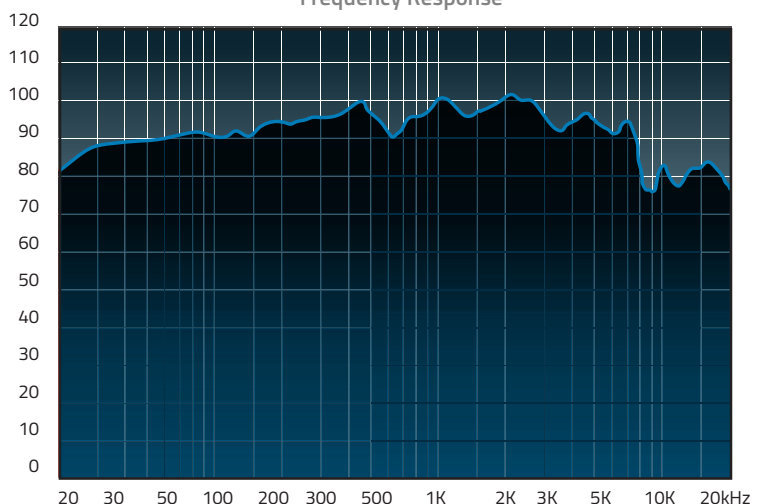

XPERT™


XPERT NEO MID-RANGE



EXM6NSB

6.5" NEODYMIUM SERIES
SEALED BACK MID-RANGE

Frequency Response

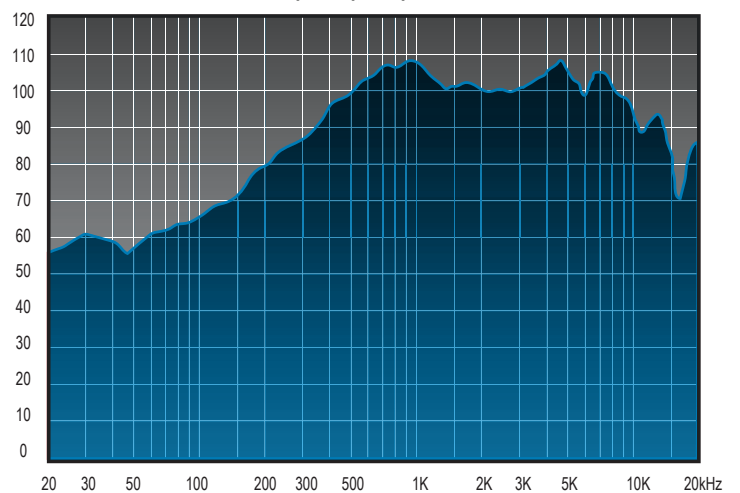

SEALED BACK MID-RANGE SPEAKERS

- RING EQUALIZED NEODYMIUM MAGNET ASSEMBLY
- IP52 RATED PAPER CONE WITH TREATED CLOTH SURROUND
- STAMPED STEEL BASKET


	EXM6NSB	EXM8NSB
Nominal Basket Size	6.49" (165 mm)	8.24" (209.50 mm)
Mounting Depth	2" (53 mm)	2.40" (61 mm)
Cutout Diameter	5.66" (144 mm)	7.04" (179 mm)
Voice Coil Diameter	1.5" (38.6 mm)	1.5" (38.6 mm)
Cone Material	Paper	Paper
Cone Edge	Treated Cloth	Treated Cloth
Basket Type	Stamped Steel	Stamped Steel
Power Handling	200 W	225 W
Dynamic Wattage	400 W	450 W
Frequency Response	400Hz - 5KHz	375Hz - 4.8KHz
Sensitivity @ 1W/1M	97.3 dB	98.9 dB
Impedance	4Ω	4Ω
Resonant Frequency (fs)	629.7Hz	474.2Hz
DC resistance (Re)	3.2Ω	3.2Ω
Mechanical Q (QMS)	5.53	5.05
Electromagnetic Q (QES)	1.40	1.76
Total Q (QTS)	1.12	1.31
Compliance Volume (Vas)	0.0L	0.0L
Mech Compliance of Suspension (CMS)	0.00 mm/N	0.00 mm/N
Master Carton	6	4
Sold As	Single	Single



EXM8NSB

8" NEODYMIUM SERIES
SEALED BACK MID-RANGE

Frequency Response

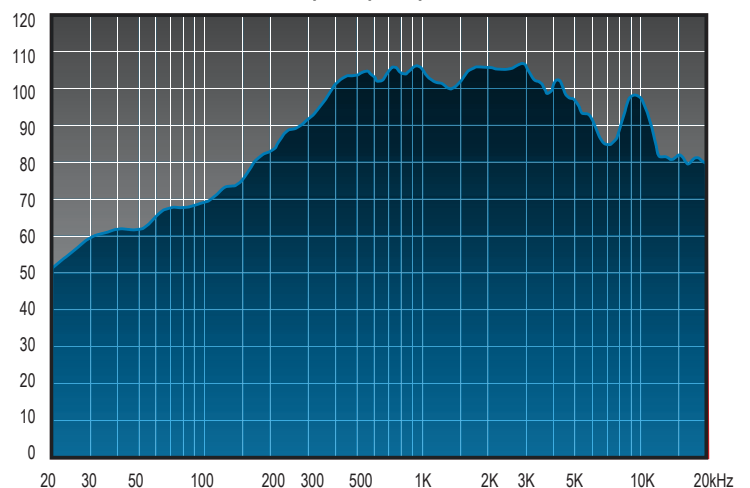


XPERT™

XPERT NEO MID-RANGE



Frequency Response

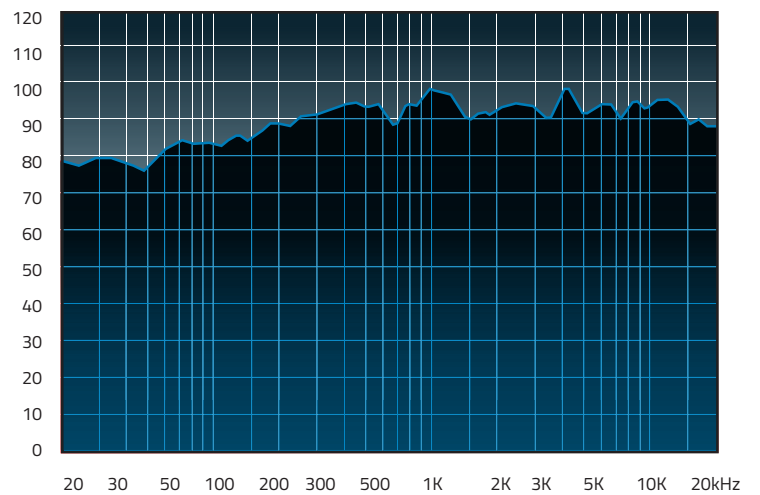

EXM6SN

6.5" NEODYMIUM SERIES
MID-RANGE

NEODYMIUM SERIES MID-RANGE SPEAKERS

- NEODYMIUM RADIALLY EQUALIZED MAGNET ASSEMBLY
- IP52 RATED PAPER CONE WITH TREATED CLOTH SURROUND
- HEAVY GAUGE STAMPED STEEL BASKET


	EXM6SN	EXM8SN
Nominal Basket Size	6.5" (165.1 mm)	8" (203.2 mm)
Mounting Depth	2.85" (72.5 mm)	3.43" (87 mm)
Cutout Diameter	5.62" (143 mm)	7.13" (181 mm)
Voice Coil Diameter	2" (51 mm)	2" (51 mm)
Cone Material	Paper	Paper
Cone Edge	Treated Cloth	Treated Cloth
Basket Type	Stamped Steel	Stamped Steel
Power Handling	200 W	300 W
Dynamic Wattage	400 W	600 W
Frequency Response	85Hz - 11KHz	85Hz - 11KHz
Sensitivity @ 1W/1M	98.1 dB	99.6 dB
Impedance	4Ω	4Ω
Resonant Frequency (fs)	119.2 Hz	71.8Hz
DC resistance (Re)	3.2Ω	3.3Ω
Mechanical Q (QMS)	8.01	4.02
Electromagnetic Q (QES)	0.45	0.39
Total Q (QTS)	0.43	0.36
Compliance Volume (Vas)	2.9L	24.4L
Mech Compliance of Suspension (CMS)	0.12 mm/N	0.36 mm/N
Replacement Tweeter Diaphragm	EXM6SN RC	EXM8SN RC
Master Carton	6	4
Sold As	Single	Single



EXM8SN

8" NEODYMIUM SERIES
MID-RANGE

Frequency Response

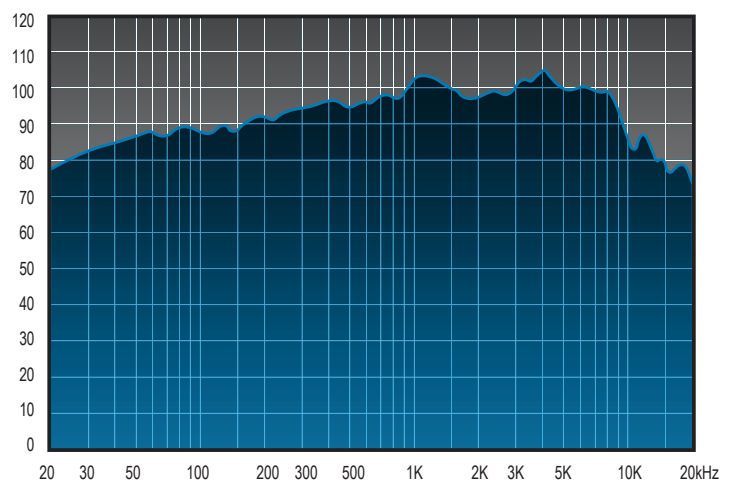

XPERT™


XPERT NEO MID-RANGE



EXM10SN

10" NEODYMIUM SERIES
MID-RANGE

Frequency Response

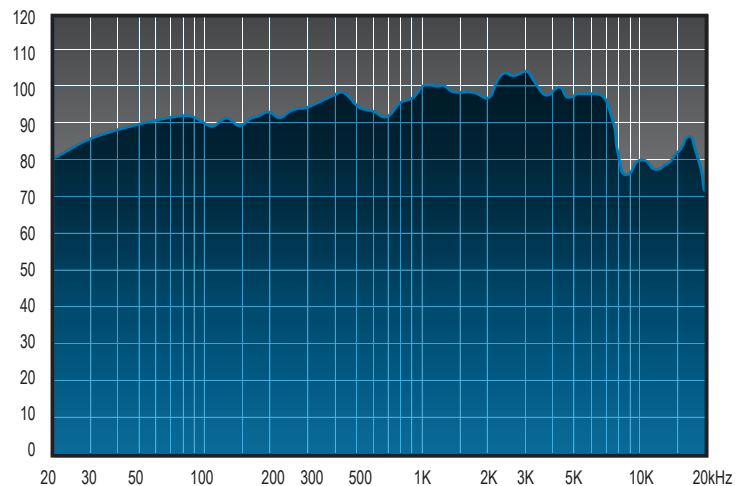

NEODYMIUM SERIES

MID-RANGE SPEAKER



- NEODYMIUM RADIALLY EQUALIZED MAGNET ASSEMBLY
- IP52 RATED PAPER CONE WITH TREATED CLOTH SURROUND
- HEAVY GAUGE STAMPED STEEL BASKET

	EXM10SN
Nominal Basket Size	10" (254 mm)
Mounting Depth	4.57" (116 mm)
Cutout Diameter	9.29" (236 mm)
Voice Coil Diameter	2.5" (63.5 mm)
Cone Material	Paper
Cone Edge	Treated Cloth
Basket Type	Stamped Steel
Power Handling - AES	500 W
Dynamic Wattage	800 W
Frequency Response	75Hz - 12KHz
Sensitivity @ 1W/1M	101.8 dB
Impedance	4Ω
Resonant Frequency (fs)	49.4 Hz
DC resistance (Re)	3.2Ω
Mechanical Q (QMS)	2.68
Electromagnetic Q (QES)	0.36
Total Q (QTS)	0.32
Compliance Volume (Vas)	46.5L
Mech Compliance of Suspension (CMS)	0.27 mm/N
Replacement Tweeter Diaphragm	EXM10SN RC
Master Carton	4
Sold As	Single



XPERT™


XPERT NEO TWEETERS

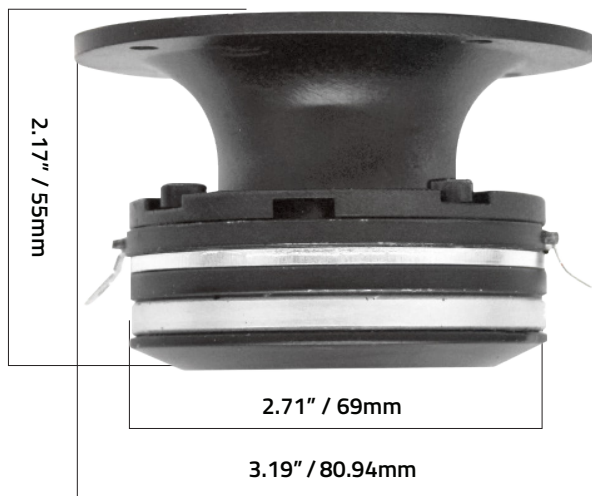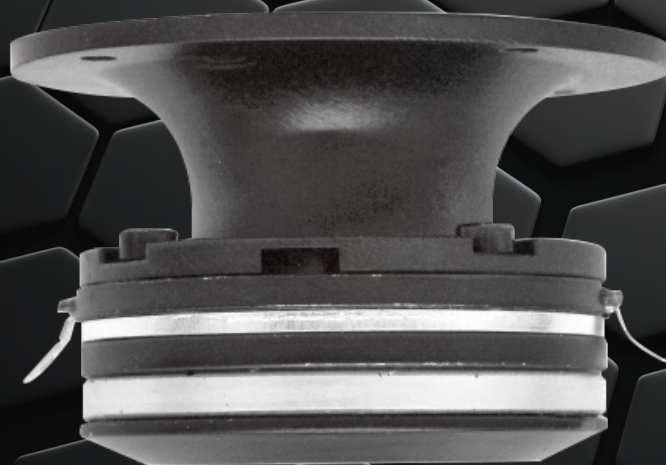

EXT1.5NH

1.5" HIGH OUTPUT XPERT NEO
SUPER TWEETER

Frequency Response

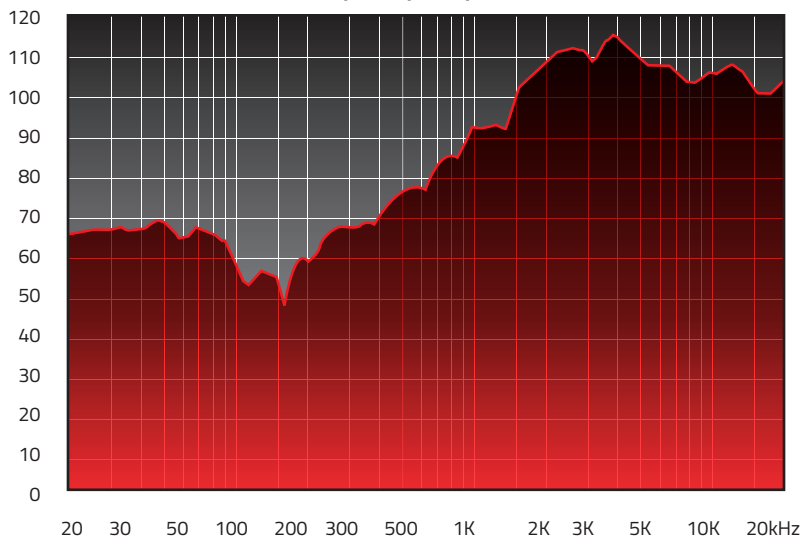


HIGH OUTPUT XPERT NEO SUPER TWEETERS

- NEODYMIUM MAGNET
- HIGH SENSITIVITY
- ALUMINUM DIE-CAST WAVEGUIDE CONSTRUCTION DESIGNED FOR WIDE DISPERSION APPLICATIONS

	EXT1.5NH	EXT1NH
Nominal Basket Size	3.19" (80.94 mm)	8" (203.2 mm)
Mounting Depth	1.8" (45 mm)	2.36" (60 mm)
Cutout Diameter	2.56" (65 mm)	2.16" (54 mm)
Voice Coil Diameter	1.5" (38.1 mm)	1" (25.4 mm)
Power Handling	85W	35 W
Dynamic Wattage	250 W	100 W
Sensitivity @ 1W/1M	106 dB	108 dB
Impedance	8Ω	8Ω
Replacement Tweeter Diaphragm	EXT1.5NH RC	EXT1NH RC
Master Carton	12	12
Sold As	Single	Pair



EXT1NH
1" HIGH OUTPUT XPERT NEO
SUPER TWEETER

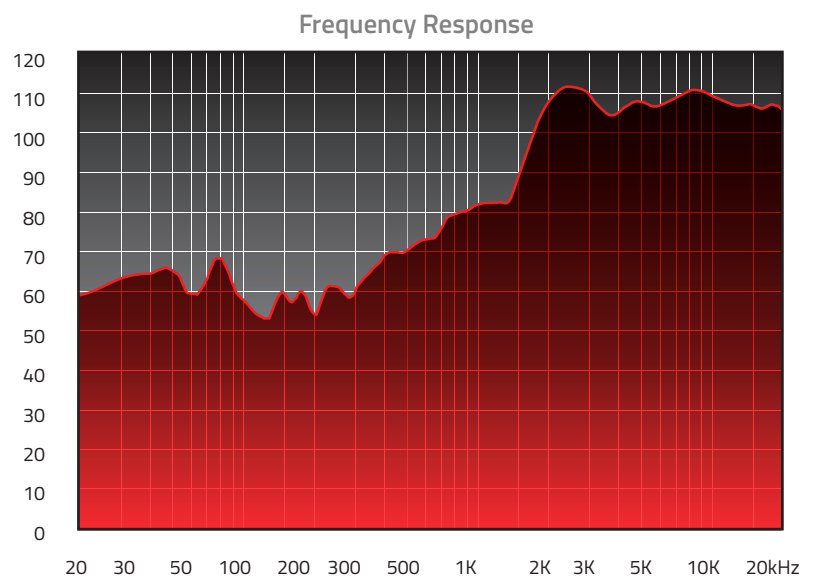

XPERT™


XPERT NEO TWEETERS



EXT1NB

1" HIGH OUTPUT
XPERT NEO TWEETER

Frequency Response

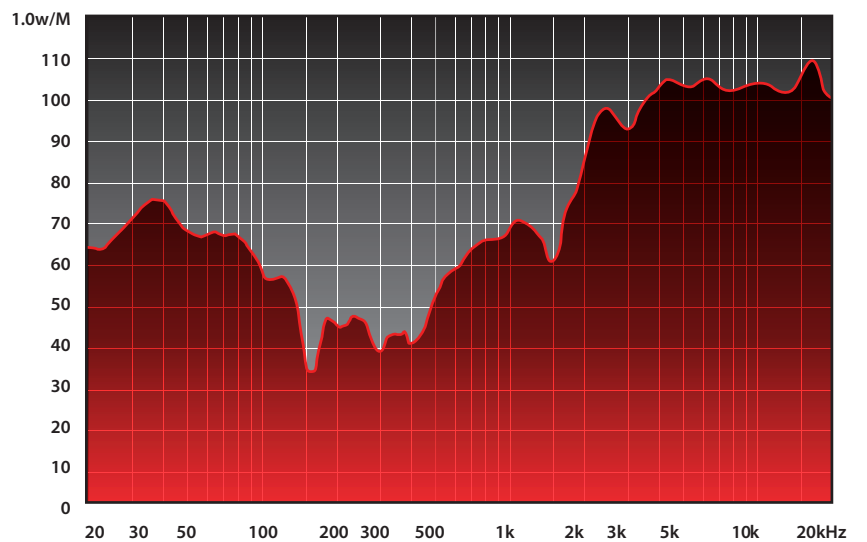


HIGH OUTPUT XPERT PHENOLIC NEO BULLET TWEETERS

- NEODYMIUM MAGNET
- HIGH SENSITIVITY
- ALUMINUM DIE-CAST CONSTRUCTION DESIGNED FOR EXTREME SPL OUTPUT

	EXT1NB	EXT2NB
Nominal Basket Size	2.28" (58 mm)	2.34" (59.6 mm)
Mounting Depth	2.51" (63.70 mm)	2.01" (51.1 mm)
Cutout Diameter	1.68" (42.6 mm)	2.16" (55 mm)
Voice Coil Diameter	1" (25.4 mm)	1" (25.4 mm)
Power Handling	55W	55W
Dynamic Wattage	125 W	125 W
Sensitivity @ 1W/1M	108 dB	108 dB
Impedance	4Ω	4Ω
Replacement Tweeter Diaphragm	EXT1NB RC	EXT2NB RC
Master Carton	24	24
Sold As	Single	Single



Frequency Response

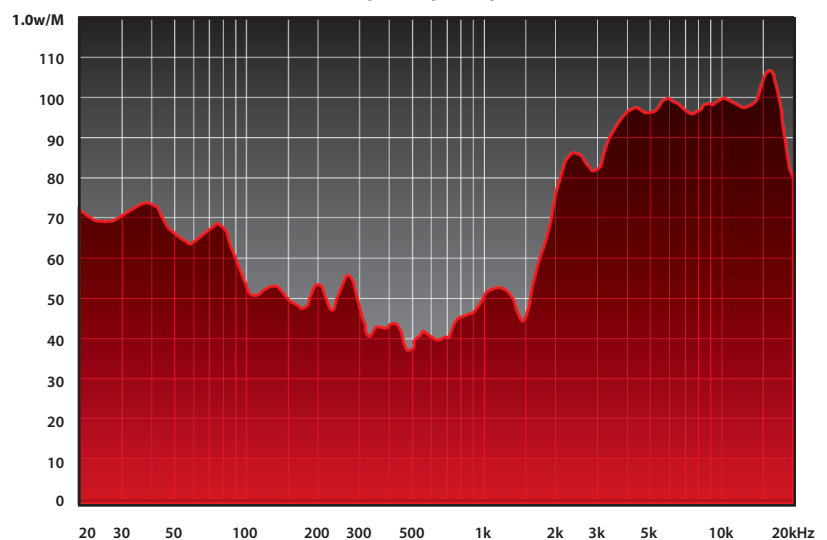

EXT2NB

1" HIGH OUTPUT XPERT PHENOLIC
NEO BULLET TWEETER






NEW
2024



EXPF3 3" | 90° AERO PORT KIT

KIT INCLUDES: (2) 90° Aero Ports, (2) Inner Flares, (2) 6" PVC Extensions & Mounting Hardware

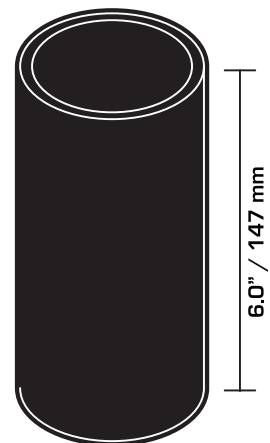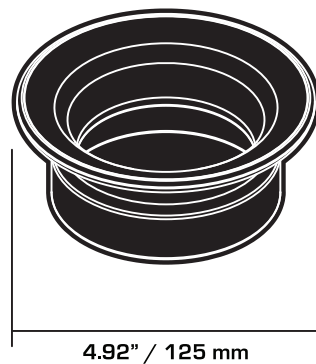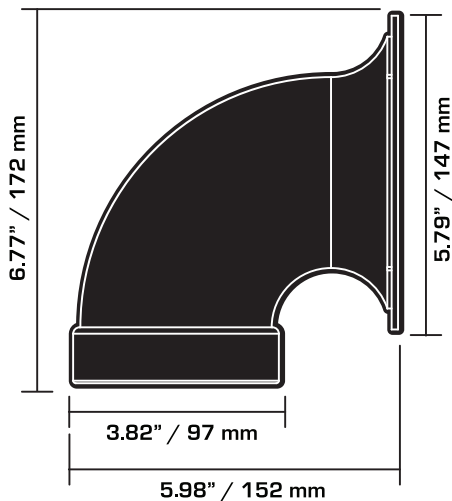

EX10NMB 3" 90° AERO PORT LENGTH CHART


CUBIC FT. FREQ.	0.5	0.6	0.7	0.8	0.9	1	1.1	1.2	1.3
38	—	—	—	—	—	11.7"	10.47"	9.3"	8.4"
40	—	—	—	—	11.8"	10.3"	9.2"	8.2"	7.4"
42	—	—	—	12.1"	10.5"	9.1"	8.1"	7.2"	6.4"
44	—	—	12.7"	10.8"	9.3"	8.1"	7.1"	6.4"	5.6"
46	—	—	11.4"	9.6"	8.3"	7.2"	6.3"	5.6"	—
48	—	12.41"	10.3"	8.6"	7.4"	6.4"	5.6"	—	—
50	—	11.25"	9.25"	7.8"	6.6"	5.7"	—	—	—
52	12.75"	10.2"	8.4"	7"	5.9"	—	—	—	—
54	11.6"	9.25"	7.6"	6.3"	—	—	—	—	—
56	10.6"	8.5"	6.9"	—	—	—	—	—	—
58	9.75"	7.7"	—	—	—	—	—	—	—
60	8.9"	7"	—	—	—	—	—	—	—
62	8.2"	6.4"	—	—	—	—	—	—	—

EX10NMB-CFXL 3" 90° AERO PORT LENGTH CHART

CUBIC FT. FREQ.	0.7	0.8	0.9	1	1.1	1.2	1.3	1.4
38	—	—	12.3"	11.7"	10.4"	9.3"	8.4"	7.7"
40	—	13.6"	11.8"	10.4"	9.2"	8.2"	7.4"	6.6"
42	14.2"	12.1"	10.4"	9.1"	8.1"	7.2"	6.4"	5.8"
44	12.7"	10.8"	9.3"	8.1"	7.1"	6.4"	5.6"	—
46	11.4"	9.6"	8.3"	7.1"	6.3"	5.6"	—	—
48	10.3"	8.6"	7.4"	6.4"	5.6"	—	—	—
50	9.25"	7.8"	6.6"	—	—	—	—	—
52	8.3"	7"	5.9"	—	—	—	—	—
54	7.5"	6.3"	—	—	—	—	—	—
56	6.8"	5.7"	—	—	—	—	—	—
58	6.2"	—	—	—	—	—	—	—
60	—	—	—	—	—	—	—	—

EX8NMB-CF 3" 90° AERO PORT LENGTH CHART

CUBIC FT. FREQ.	0.25	0.3	0.35	0.4	0.45	0.5	0.55	0.6	0.65
54	—	—	—	—	—	11.6"	10.3"	9.2"	8.3"
56	—	—	—	—	12.1"	10.6"	9.4"	8.4"	7.6"
58	—	—	—	12.8"	11.1"	9.7"	8.6"	7.7"	6.3"
60	—	—	—	10.9"	10.2"	8.9"	7.9"	7"	5.7"
62	—	—	12.8"	10"	9.4"	8.2"	7.2"	6.4"	—
64	—	—	11.8"	9.3"	8.7"	7.5"	6.6"	—	—
66	—	12.35"	11"	8.6"	8"	6.9"	6.1"	—	—
68	—	11.5"	10.25"	8"	7.4"	6.4"	—	—	—
70	—	11"	9.5"	7.4"	6.8"	5.9"	—	—	—
7	—	10.75"	8.8"	6.9"	5.8"	—	—	—	—
74	—	10"	8.2"	6.9"	—	—	—	—	—
76	—	9.3"	7.6"	6.4"	—	—	—	—	—
78	—	8.79"	7.1"	5.9"	—	—	—	—	—
80	—	8.32"	6.6"	5.5"	—	—	—	—	—

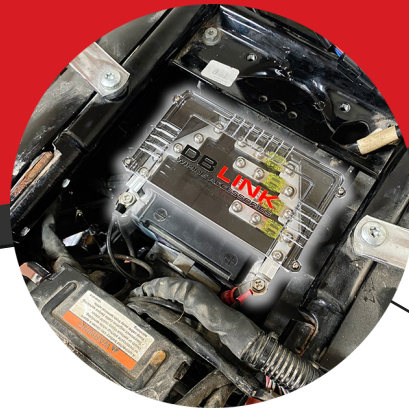


EASY INSTALL:
 UNDER SEAT ON TOP
 OF BATTERY

PSMANL4

4 POSITION POWERSPORT ANL FUSE HOLDER

- Adjustable Terminal Bolt 4.6" - 5.7" Center to Center
- Compatible with : UTV, ATV, and Motorcycle batteries
- Terminal Bolt Diameter : 5.23mm / 0.20 in
- Includes 2-40 AMP & 2-80 AMP Mini ANL Fuses

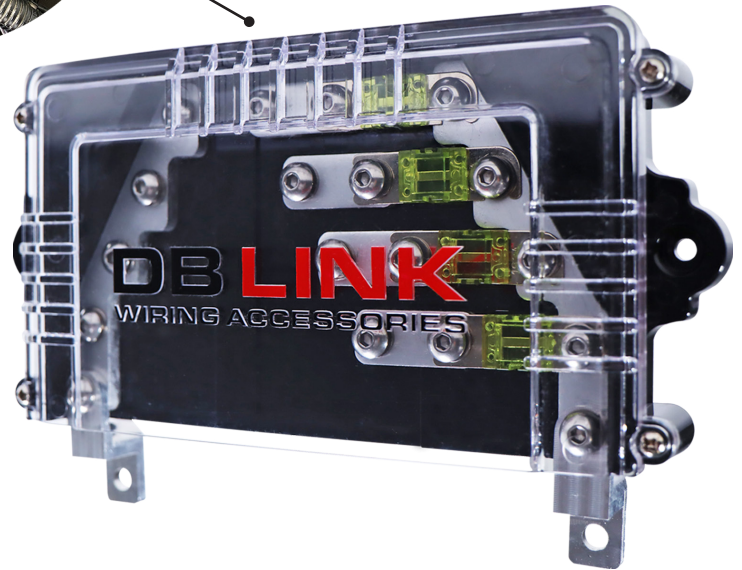


DBLHDH1

WATERPROOF SADDLE BAG SPEAKER WIRE HARNESS

- Waterproof
- Quick Disconnect
- Saddle Bag Harness
- Wire Length: 137" / 349cm



**QUICK
 DISCONNECT**

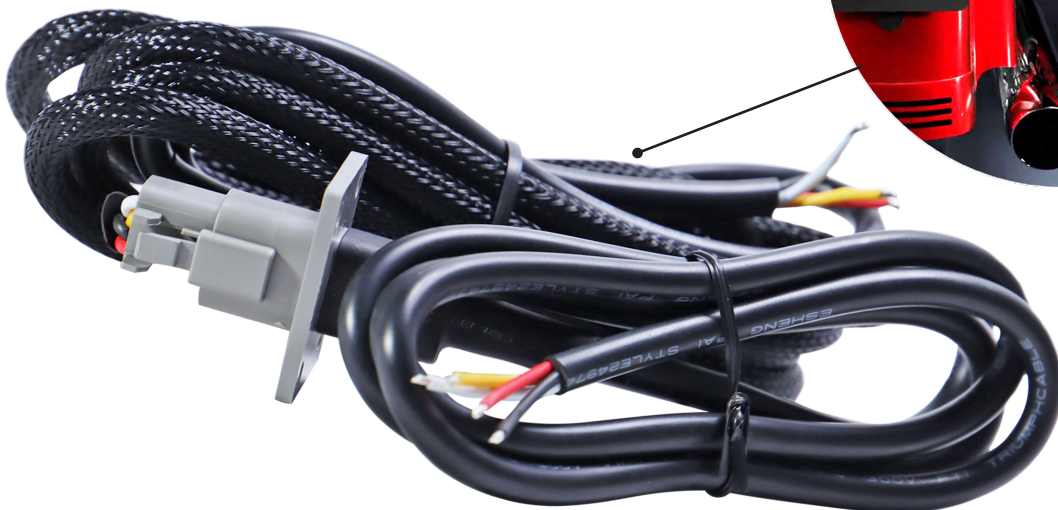

ICON GLOSSARY



SIGNAL EVALUATION STATUS INDICATOR

THE S.E.S.I. CIRCUIT ENABLES THE USER TO MONITOR SIGNAL STATUS THE AMPLIFIER TO MAKE SURE THAT THE OUTPUT SIGNAL IS NOT CLIPPED OR DISTORTED



ADAPTIVE CROSSOVER TECHNOLOGY

THE A.C.T CIRCUIT IS A FREQUENCY FILTER NETWORK CAPABLE OF ADAPTING TO ANY SPEAKER SYSTEM REQUIREMENT



DIRECT CONNECT SPEAKER TERMINALS

D.C.S.T - DIRECT CONNECT SPEAKER TERMINALS OFFER HIGH POWER CONDUCTIVITY



AUDIO PROTECTION CIRCUIT

A.P.C - THE AUDIO PROTECTION CIRCUIT MONITORS THE S.E.S.I CIRCUIT AND PROTECTS THE AMPLIFIER FROM DAMAGE IF ANY FAULTS ARE PRESENT IN THE SIGNAL OR SPEAKER OUTPUTS.



CHASSIS HEAT MANAGEMENT

C.H.M - THE CHASSIS HEAT MANAGEMENT CIRCUIT MONITORS THE TEMPERATURE OF THE AMPLIFIER AND WILL PROTECT IT IF IT'S OVERDRIVEN PAST ITS NORMAL OPERATION TEMPERATURE.



LARGE GAUGE POWER WIRE INPUTS

L.G.P.W.I - LARGE GAUGE POWER WIRE INPUTS ENSURE THAT THE AMPLIFIERS WILL ACCEPT THE PROPER GAUGE WIRE NEEDED TO ACHIEVE THE BEST PERFORMANCE.



CHASSIS HEAT MANAGEMENT

C.H.M - THE CHASSIS HEAT MANAGEMENT CIRCUIT MONITORS THE TEMPERATURE OF THE AMPLIFIER AND WILL PROTECT IT IF IT'S OVERDRIVEN PAST ITS NORMAL OPERATION TEMPERATURE.



LARGE GAUGE POWER WIRE INPUTS

L.G.P.W.I - LARGE GAUGE POWER WIRE INPUTS ENSURE THAT THE AMPLIFIERS WILL ACCEPT THE PROPER GAUGE WIRE NEEDED TO ACHIEVE THE BEST PERFORMANCE.

EUPHORIA™

XPERT™

LOUDSPEAKERS & AMPLIFIERS



302 Hanmore Industrial Parkway/Harlingen, TX 78550

Toll Free: (877) 787-0101 Fax: (956) 421-4513

www.dbdrive.net contact us at: sales@dbdrive.net

Tech Support: support@dbdrive.net

Printed in China

EXCAT24A

EXCAT24A

81153603 779